



Electrical measurement instruments are playing an essential role in development of all industries.

We want to contribute by providing high-quality products for test and measurement and by providing best possible services.

## **TABLE OF CONTENTS**



INTRODUCTION	Page
Evolution of the Power Grid Future of Power Quality	4 5
Applications	6
MOBILE POWER QUALITY ANALYZERS	9
PQA 8000 PQA 7000	
Grid Impedance Analyser GIA	
POWER QUALITY MONITORS	32
PQM 100 PQM 200	
POWER QUALITY SYSTEM SOFTWARE	45
PQM SCADA	
Energy Meter WAMS	
SOLAR / PV TESTSYSTEMS	50
PV Master 10 PV Master 70	
PV Master 80	
ACCESSORIES	63
Current Sensors Voltage Sensors	
Other Accessories	
MEASUREMENT SERVICES	71
ABOUT NEO MESSTECHNIK	77
Company Profile Quality	
Social Responsibility	





From Power Generation via Transmission and Distribution Grids to changes in electrical equipment and energy consumption, the electrical power grid is constantly evolving.

#### Changes in **Power Generation**:

- Large conventional plants are being replaced with a high number of small units (connected to Low-Voltage grids)
- There is a shift to non-dispatchable renewable energy
- Synchronous machines are being replaced by power-electronic interfaces

#### Changes in Transmission and Distribution:


- Advancements are being made in Power Electronic Equipment (Filters, STATCOM, etc.)
- Two-Way Power Flow are being introduced due to distributed generation
- HV AC cables and HVDC systems are being re-innovated
- There is an increased use in Power-Line communication

#### Changes in **Consumption**:

- Energy-efficient device usage is increasing
- There is an overwhelming proliferation of small devices on the grid
- There is an increase in Electric-Vehicles and Heat pumps
- There is almost a complete shift to active Power Electronics (motors, pumps, lighting,...)

These changes require new technologies such as Microgrids, Demand Side management (DSM), Distributed Generation (DER), Distributed control (U, P), Feeder Reconfiguration, etc.

The decrease in short-circuit power and destabilization of the grid require that the distributed generation units also need to provide services to the power grid. This services are defined in **Grid Codes** (international and national regulations).

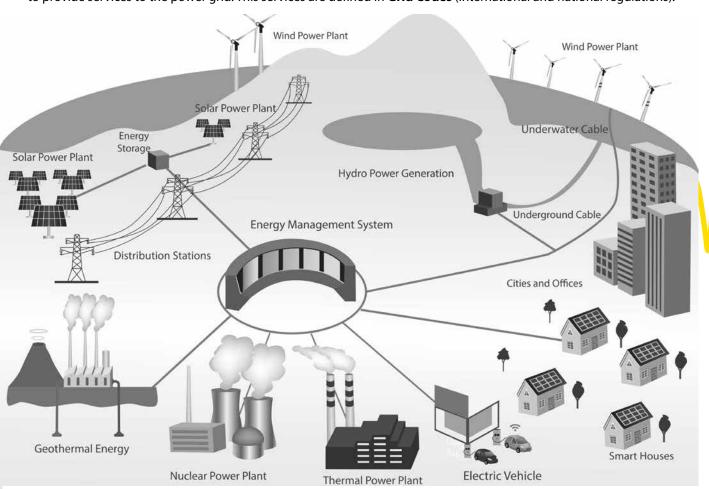

# FUTURE OF POWER QUALITY




Classical Power Quality Analysis according to EN50160, including reports defined by the measurements of Voltage variations, Frequency, Harmonics (50th order), Flicker and Unbalance, are no longer sufficient.

Power Quality Analysis must adapt to the ever-evolving power grid, which requires additional measurements such as:

- ▼ Supraharmonics up to 150 kHz / 500kHz for voltage and current
- ✓ Disturbance Recording (1/2 period)
- 🇹 Phase Angle jump recording
- ✓ Fast Frequency changes (1/2 period)
- Symmetrical components Analysis
- ✓ Resonances / Oscillations measurement
- ✓ Fast Switching processes
- ✓ DC offset
- ✓ Subharmonics
- Grid Impedance Measurement up to 150 kHz / 10 MHz
- ✓ PLC interference
- ▼ PQ Spreading Analysis (e.g. connection of multiple EV Chargers of same type)
- Analysis of PQ mitigation methods (e.g. lowering Harmonics can increase the level of Supraharmonics)


#### **The NEO Advantage**

NEO Messtechnik instruments are engineered and designed to fulfill all of these requirements. In addition to classical PQ Analysis and Reporting according to international standards (EN50160), it is possible to measure **Suprharmonic currents and voltages**, to detect any Waveform deviation as well as any Disturbance (1/2 period based) or Dynamic processes in the electrical power grid (PMU).

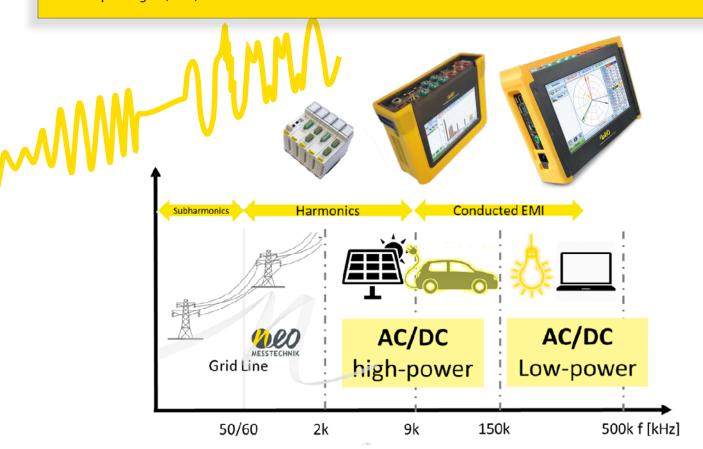




## **APPLICATIONS**

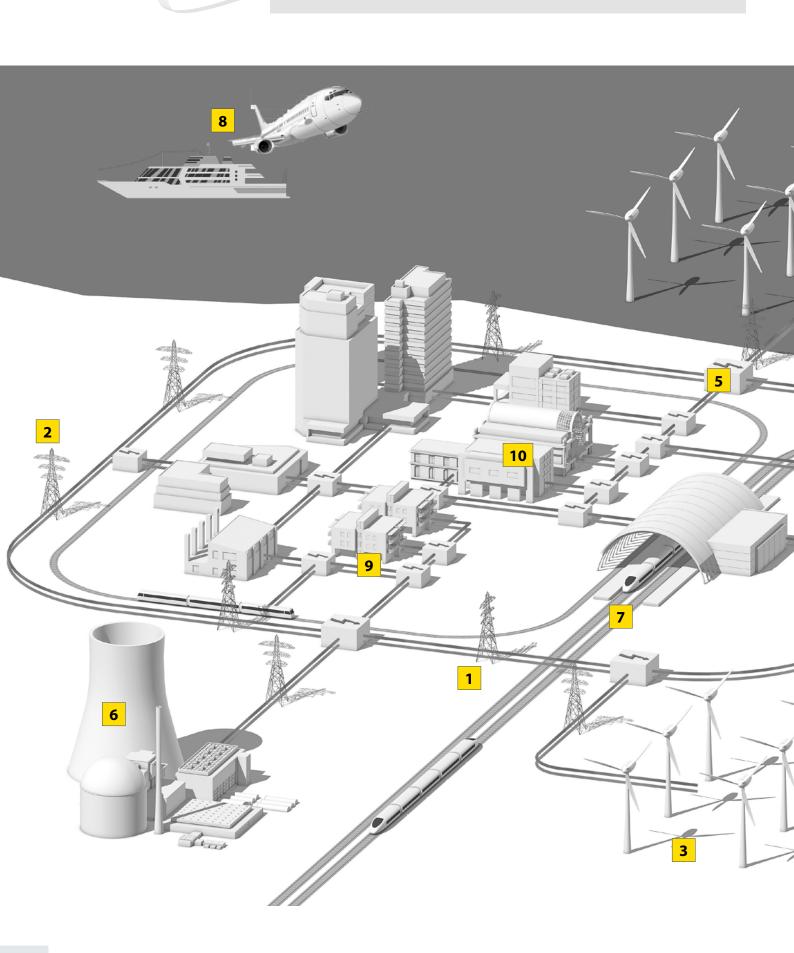

#### **APPLICATIONS**



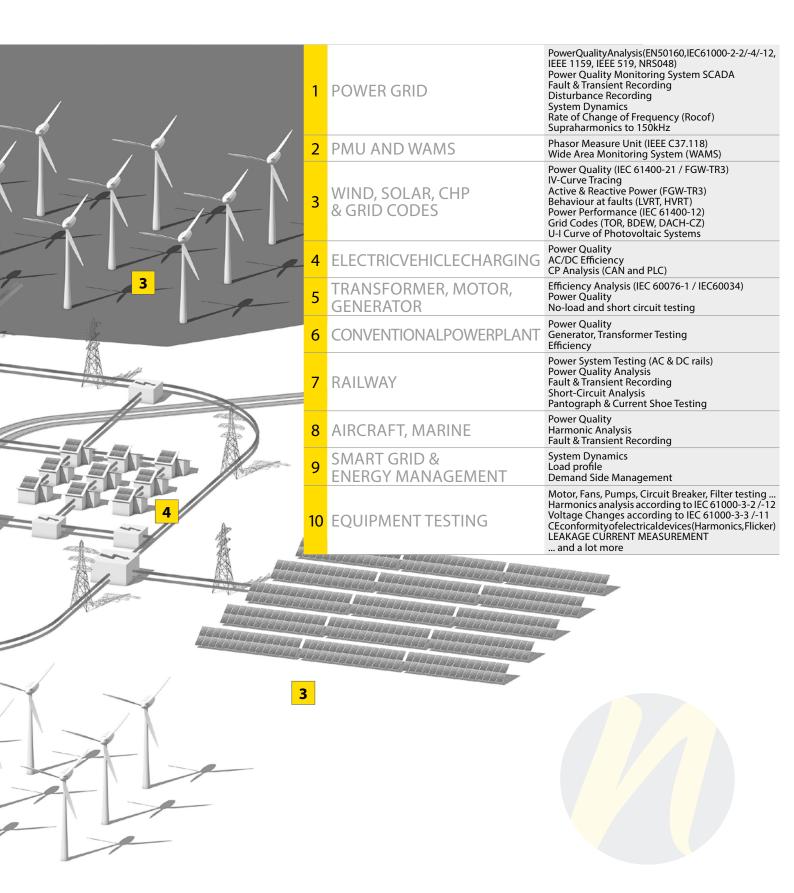



# MOBILE POWER QUALITY





#### **PQA 8000**

Highlights
Hardware Highlights
Software Highlights
Power Quality Class A++
NEO Sensor Calibration
Instrument Options
Specifications
Accessories

#### **PQA 7000**

Highlights Hardware Highlights Software Highlights Power Quality Klasse A++

#### **APPLICATIONS**

PQ Class A
EN50160 / IEC61000-2-2/-4/-12
IEEE 519 / NRS048
Disturbance Record
Transients
Supraharmonics
Photovoltaic / PV Tester
Wind Power
Electric Vehicle Charging Station





# POWER QUALITY ANALYZER

# **PQA 8000**





#### **Power Quality**

Harmonics, THD Supraharmonics 500kHz Unbalance etc.



#### **System Dynamics**

Phasor Measure Unit (PMU), Rate of Change of Frequency (RoCoF), WAMS, etc.



#### **Transients**

1/2 period values, Phase Angle jumps, Resonances, Switching etc.



#### **Power**

Active, reactive, apparent power, PF, harmonic power, energy, etc.

HIGH ACCURACY
HIGH SAMPLING RATE
HIGH RESOLUTION
HIGH DYNAMIC RANGE
HIGH SAFETY CATEGORY
DATA STORAGE

0.05% 124kS/s or 1MS/s 18bit 0.5mA to 150kA CAT IV 600V up to 1TB SSD Batterie
4h
90 Wh

Display

10.1 inch
Multi-Touch

Isolation

Standards IEC61000-4-30

Class A

6kV

#### **HIGHLIGHTS**



#### **SMART TOUCH**

The large 10.1 inch full-HD Smart Touch display responds immediately without any delay with intuitive operation like on a mobile phone.

#### **MOBILE OPERATION**

The integrated battery pack allows an operating time of up to 4 hours of operation. 5 LEDs indicate the remaining battery capacity. There is no need for an external power supply or special connectors... plug and play.

#### **GPS**

Integrated GPS enables high-precision time measurements & synchronization, which is ideal for PMU applications.



#### **LARGE SSD**

The instrument is equipped with two SSD disks. One is dedicated for the OS and application software, and the other one is equipped for data storage (up to 1 TB).

#### **INTERFACES**


The instrument provides an easy integration with other analog and digital signals such as temperature. The interfaces include USB 3.0, TCP/IP, LAN, Wifi, Bluetooth, RS232, Modbus, 104, DIO, and CAN.

#### SENSOR SUPPLY

The instrument can provide excitation for your current sensors, and there is no need for batteries or external power supplies.

#### SUPRAHARMONICS UP TO 500 kHZ FOR VOLTAGE AND CURRENT

Conventional PQ Analyzers, even if they are Class A certified, are not sufficient for modern measurement applications. We use the best available components to ensure the highest safety category and also the highest accuracy. NEO instruments offer high bandwidth (up to 1 MHz) and correct the frequency dependent behavior of current & voltage sensors as well as integrated electronics to achieve the best possible measurement results. THE REFERENCE INSRUMENT

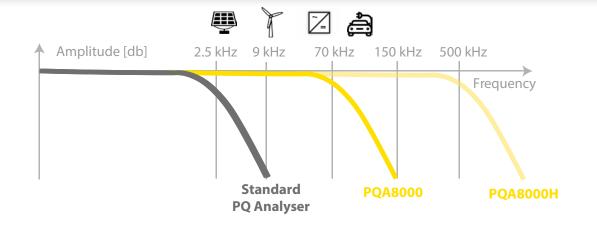


# SOFTWARE

1

#### **SETUP**

The instrument has a clear structure that shows schematics with explanations.







2

#### **MEASURE**

During measurements the user can define widgets such as Scopes, Vector Scopes, Harmonic FFTs, Tables, and Recorders.





## TRULY INTUITIVE

Intuitive Measurement menus: Cleary structured and explicit menus

## **HIGHLIGHTS**



3

#### **ANALYZE**

Sophisticated functions include PQ Data, Transients, Disturbances, and Alarms.



EXPORT

Data can be exported into CSV, XLS, PDF, Comtrade, and PQDiff.

6

#### **OTHER PROGRAMS**

The instrument uses Microsoft Windows© as the operating system. Programs such as Microsoft Excel, Word or Matlab can be added as well as Email messaging services.



# NEO SENSOR CALIBRATION


#### **HIGHEST PRECISION**

The NEO way of Sensor Integration

All current sensors offered by NEO Messtechnik are industry proven for different applications. We use and improve on the best available sensors in the market.

#### 1) FREQUENCY DEPENDENT CALIBRATION

The NEO sensor integration calibrates each sensor over a wide frequency bandwidth and corrects frequency dependent phase shift and amplitude damping. This enables high precision from DC to high-frequency measurements.

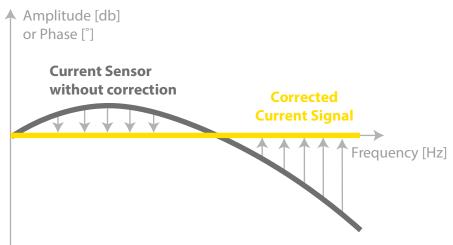

#### 2) MEASUREMENT RANGE DEPENDENT CALIBRATION

In addition, the sensors will calibrated for each measurement range using multiple points.

The calibration will typically cover points from 1% to 100% of the nominal measurement range.

This will improve the accuracy and precision, especially at low current (e.g., 1% of nominal measurement range).

All sensors will be delivered with a standard calibration, which improves the accuracy compared to nominal specifications, whereas the NEO calibration will be performed on each individual sensor and needs to be ordered separately.



## **INSTRUMENT OPTIONS**



#### **PQA8000**

4x Voltage Input 1600V DC 4x Current Input (Rogowski, Clamp) CAN / RS485



#### **PQA8000-P**

4x Voltage Input 1600V DC 6x Current Input (Rogowski, Clamp) 2x Analog Input (± 10V) CAN / RS485 / DIO



## **PQA8000-M**

4x Voltage Input 1600V DC 8x Current Input (Rogowski, Clamp) CAN / RS485 / DIO



#### **CUSTOMIZE DESIGN**



# -select the color of the connectors to match cabling or standards

In addition, the transport bag of the PQA8000 device can be embroidered with company logos.

# **LOCO**MESSTECHNIK

# SPECIFICATIONS & ACCESSORIES



GENERAL SPECIFICATIONS		
PC	Microsoft® Windows 10 IOT(64 bit) Intel® Quad Core Processor and 8GB RAM Locked OS for reliable operation Multilanguage Support	
Storage	256GB SSD for OS and application software 256GB SSD dedicated for Data storage	
Display	10.1 inch Capacitive Multi-Touch TFT LCD Sunlight Readable / 800cd	
Battery	Li-lon Battery 90Wh up to 4h operation	
<b>Power Supply</b>	115V / 230V AC	
Interfaces	3x USB, 1x Ethernet, WiFi, 1x HDMI	
Dimensions	298 x 225 x 95 mm 11.8 x 8.8 x 3.7 inch	
Weight	4kg / 8.8pound	
Temperature Range	Operating: 0 to 60°C (32°F to 140°F) Storage: -20 to 80°C (-4°F to 176°F)	
IP Class	IP2X	
Accessories	Transport Bag and Keyboard included	
Standards & Certification	IEC61010-1 (2011) / IEC61010-2-030 / IEC 61000-4-3 / IEC 61000-4-4 / LVD Directive 2014 / EMC Directive 2014/ Rohs Directive 2015 / EN 61000-3-2 / EN 61000-3-3 / EN 61326-1 / EN 55011 +A1, Class A	

OPTIONS AND AC	CESSORIES
SSD Upgrade	Upgrade to 512GB or 1TB data storage
GPS	Integrated GPS receiver and GPS mouse
GSM	Integrated Modem for telecommunication
DC Power	DC Power supply input +9V +36V DC
Dust Cover	Protect PQA8000 instrument in tough environments
Transport Case	Ruggedized Pelican-Case (IP67), with foamed insert adapted for the measurement instrument and pullout handle
color Code	Color code for all voltage and current inputs
Temperature Sensor	Thermocouple Type K temperature sensor on DSUB15 input
Radiation Sensor	Pyranometer Sensor on DSUB15 input
Current Sensor	See Chapter Accessories
Test Leads	See Chapter Accessories



## **SPECIFICATIONS**



VOLTAGE INPUT	5	CURRENT INPUTS	
Inputs	4x	1	PQA8000: 4x
Range	Standard: 1600V/ 800V	Inputs	PQA8000-P: 6x PQA8000-M: 8x
	MV-Version: 600V / 20V 0.05% f.s.	Accuracy	0.05% f.s.
Accuracy Isolation	6kV isolation	Туре	Clamp or Rogowski
isolation	CAT III 1000V	Instrument Ranges Clamp	2mV to 10V (15x Ranges)
Safety	CAT IV 600V	Integrator Rogowski Rang	e 1A to 300kA
Impedance	10 ΜΩ	Additional Analog Inputs (AII	N) 1V, 2V, 5V, 10 V
		Sensor Supply	±15V / 9V
		TEDS	Automatic Sensor Detection
		Impedance	10 ΜΩ
ANALOG DIGITAI	L CONVERSION (A/D)	DIGITAL I/O & INTERFAC	ES
Sampling Rate / Resolution	PQA8000: 124 kS/s / 24bit PQA8000H: 1 MS/s / 18bit	Digital In/Out	Adjustable Trigger max. 350V
Filters	Analogue and Digital	CAN, RS485	Selectable Termination

**Automatic Anti-Aliasing Filter** 

**Filters** 



## **POWER QUALITY**

#### **POWER**

Voltage Current Power Power Signalling

Power Calculation	P, Q, S, PF, cos phi, D, DH, QH
Frequency	10 sec, AVE, MIN, MAX
Voltage, Current	RMS, AVE, MIN, MAX, ½ Period-values, 200ms, 10s, 10min
Energy	Total, positive, negative (P, Q, P+, P-, Q+, Q-)
Efficiency	DC / AC, U-I Curve for PV
Wiring	DC, 1-Phase, 2-Phase, 3-Phase Star and Delta

#### **WAVEFORM & TRANSIENTS**

DELTA

dU, dI, df, dP, etc.

DERIVATE (RATE OF CHANGE)

dU/dt, df/dt etc. ... per ms, number of periods or half-period

COMBI-TRIGGER

Combination of triggering including mulitple conditions

VOLTAGE SIGNALLING

RAPID VOLTAGE CHANGES (RVC's)

dU, dc, dt

**EN50160** Trigger on any EN50160 parameter (Max, Quantil)

#### **COMPLYING STANDARDS**

#### **POWER QUALITY, HARMONICS, FLICKER:**

IEC61000-4-30 Ed. 3 Class A / IEC61000-4-7 / IEC61000-4-15 / IEC62586-2 Ed. 2 / IEC62586-1

#### **PUBLIC GRID, RAILWAY AND INDUSTRY**

EN50160 / EN50163 / IEC61000-2-2 / IEC61000-2-4 (Class 1; 2; 3) /

IEEE519 / IEEE 1159 / IEC61000-2-12 / NRS048

#### WIND POWER, RENEWABLES AND GRID CODES

IEC61400-21 / IEC61400-12 / FGW-TR3 / VDE N-4105 / VDE N-4100 / VDE N-4110 / D-A-CH-CZ / BDEW / ROCOF / IEEE C37.118-2005 (PMU)

#### MOTORS, TRANSFORMERS AND ELECTRICAL EQUIPMENT

IEC60034 / IEC 60076-1 / IEC61000-3-2 / IEC61000-3-3 / IEC61000-3-11 / IEC61000-3-12



## **CLASS A++**



#### **POWER QUALITY**

Harmonics Interharmonics Supraharmonics Flicker Unbalance Voltage Variations

according to IEC 61000-4-30 Ed.3 and IEC 62586	
Harmonics (Voltage, Current, Phi, Power)	Class A
Interharmonics	Class A
THD U, THD I	Class A
Higher Frequencies (200Hz band)	2 - 9 kHz (can be calculated from 0 to definable upper limit)
Higher Frequencies (2000Hz band)	8 - 150 kHz / 500 kHz for voltage and current (PQA 8000H)
Symmetrical Components & Unbalance (Pos-, Neg- and Zero Sequence)	Class A
Rapid Voltage Changes	Class A
Flicker (PST, PLT, Pinst)	Class A
Voltage Events (dip, swell, interruption – time, extrema, length)	Class A
Frequency	10 sec, AVE, MIN, MAX
Voltage, Current	RMS, AVE, MIN, MAX, ½ Period-values, 200ms, 10s, 10min
Time Synchronisation	Class A

#### **DISTURBANCES AND SYSTEM DYNAMICS**

1/2 PERIOD TRIGGER	U, I, P, Q, S, f, PF, phi, THD, Harmonics, Interharm., Unbalance, etc.	
PHASE ANGLE TRIGGER	phi	
SYMMETRICAL COMPONENTS	Pos., Neg., Zerosequence	
RATE OF CHANGE FREQUENCY (ROCOF)	df/dt	
Phasor Measure Unit (PMU) according to IEEE C37.118	Total Vector Error 0.01% (typ.) Angle Error 0.003°(typ) Timestamp Accuracy 0.1 µs up to 50 fps / via TCP / open PDC format / Offline storage possible	

#### **ADDITIONAL FEATURES INCLUDE**







## **POWER QUALITY ANALYZER**

## **PQA 7000**





## **Power Quality**

Harmonics, THD Supraharmonics, Symmetrical components etc.



#### **System Dynamics**

**Phasor Measure Unit** (PMU), Rate of Change of Frequency (RoCoF), WAMS, etc.



#### **Transients**

1/2 period values, Phase Angle jumps, Resonances, Switching etc.



#### **Power**

Active, reactive, apparent power, PF, harmonic power, energy, etc.

**HIGH ACCURACY** 

**HIGH SAMPLING RATE** 

**HIGH RESOLUTION** 

**HIGH DYNAMIC RANGE** 

**HIGH SAFETY CATEGORY** 

DATA **STORAGE** 

0.05%

48 kS/s

24bit

0.5mA to 150kA

CAT IV 600V

up to 256 GB

**Isolation** 

**Standards** 

**6kV** 

IEC61000-4-30 Class A

#### **HIGHLIGHTS**



#### **SMART TOUCH**

The 7 inch Smart Touch display responds immediately without any delay with intuitive operation like on a mobile phone.

#### **MOBILE OPERATION**

The integrated battery pack allows an operating time of up to 6 hours of operation. 5 LEDs indicate the remaining battery capacity. There is no need for an external power supply or special connectors... plug and play.

#### **GPS**

Integrated GPS enables high-precision time measurements & synchronization, which is ideal for PMU applications.



#### **STORAGE**

The instrument offers an internal memory of 32 GB which can be extended up to 256GB. The storage can further be increased by a USB disk.

#### **INTERFACES**


The instrument provides an easy integration with other analog and digital signals such as temperature. The interfaces include USB 3.0, TCP/IP, LAN, Wifi, Bluetooth, RS232, Modbus, 104, DI, and CAN.

#### SENSOR SUPPLY

The instrument can provide excitation for your current sensors, and there is no need for batteries or external power supplies.

#### HIGHEST ACCURACY

The NEO sensor integration calibrates each sensor over a wide frequency bandwidth and corrects frequency dependent phase shift and amplitude damping. In addition, the sensors will calibrated for each measurement range using multiple points (1% to 100%). This unique technology improves the performance of each sensor and ensures highest accurate measurement results.

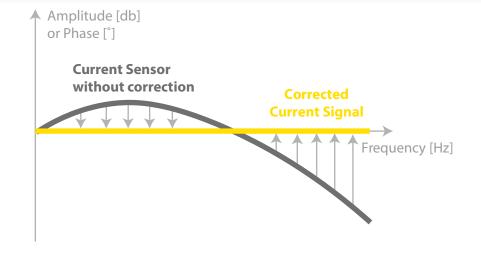




## **SOFTWARE**


1

#### **SETUP**

The instrument has a clear structure that shows schematics with explanations.








2

#### **MEASURE**

During measurements the user can define widgets such as Scopes, Vector Scopes, Harmonic FFTs, Tables, and Recorders.

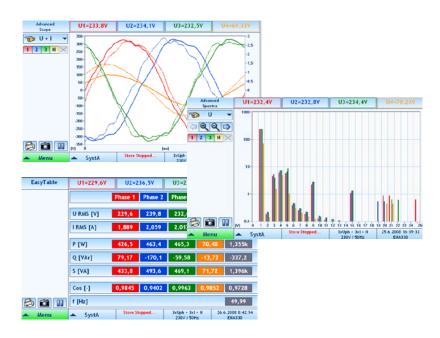



## TRULY INTUITIVE

Intuitive Measurement menus: Cleary structured and explicit menus


## **HIGHLIGHTS**



3

#### **ANALYZE**

Sophisticated functions include PQ Data, Transients, Disturbances, and Alarms.

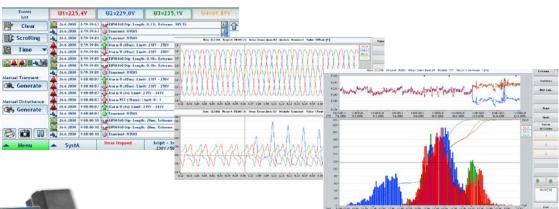



4

#### **REPORT**

The instrument can automatically generate reports and professional documentation. The user can create reports that include all relevant information (location, comments, company logo, etc) directly on-site or during post processing. PDF reports that are saved on the instrument are always available and can be shared directly via email.

Report	Database	Remote
EN50160	SCADA	Connection
Report		~

5

#### **EXPORT**

Data can be exported into CSV, XLS, PDF, Comtrade, and PQDiff.



#### OTHER PROGRAMS

The instrument uses Microsoft Windows© as the operating system. Programs such as Microsoft Excel, Word or Matlab can be added as well as Email messaging services.



## **HARDWARE**



GENERAL SPECIFICATIONS		
PC	Microsoft® Windows 10 IOT(64 bit) Intel® Quad Core Processor and 4GB RAM Multilanguage Support	
Storage	32GB	
Display	7 inch Capacitive Multi-Touch TFT LCD Sunlight Readable	
Battery	Li-lon Battery 80Wh up to 6h operation	
Power Supply	10-30 V DC	
Interfaces	2x USB, 1x Ethernet, WiFi	
Dimensions	250 x 190 x 80 mm 9.84 x 7.5 x 3.2 inch	
Weight	2,3kg / 5 pound	
Temperature Range	Operating: 0 to 60°C (32°F to 140°F) Storage: -20 to 80°C (-4°F to 176°F)	
IP Class	IP2X	
Accessories	Transport Bag and Keyboard included	
Standards & Certification	IEC61010-1 (2011) / IEC61010-2-030 / IEC 61000-4-3 / IEC 61000-4-4 / LVD Directive 2014 / EMC Directive 2014/ Rohs Directive 2015/ EN 61000-3-2 / EN 61000-3-3 / EN 61326-1 / EN 55011 +A1, Class A	



## **HIGHLIGHTS**



VOLTAGE INPUTS	
Inputs	4x
Range	1600V/ 800V
Accuracy	0.05% f.s.
Isolation	6kV isolation
Safety	CAT III 1000V CAT IV 600V
Impedance	10 ΜΩ

CURRENT INPUTS	
Inputs	5x
Accuracy	0.05% f.s.
Туре	Clamp or Rogowski
Instrument Ranges Clamp	2mV to 10V (15x Ranges)
Integrator Rogowski Range	1A to 300kA
Sensor Supply	±15V
TEDS	Automatic Sensor Detection*
Impedance	10 ΜΩ



ANALOG DIGITAL	CONVERSION (A/D)
Sampling Rate	48 kS/s

Sampling Rate	48 kS/s
Resolution	24 bit
Filters	Analogue and Digital Automatic Anti-Aliasing Filter

#### **DIGITAL IN & INTERFACES**

Digital In	Adjustable Trigger
CAN, RS485	Selectable Termination

OPTIONS AND ACCESSORIES		
Storage Upgrade	Upgrade to 256 GB data storage	
GPS	Integrated GPS receiver and GPS mouse	(
Transport Case	Ruggedized Pelican-Case (IP67), with foamed insert adapted for the measurement instrument and pullout handle	
Color Code	Color code for all voltage and current inputs	ı
Current Sensor	See Chapter Accessories	
Test Leads	See Chapter Accessories	







## **POWER QUALITY**

#### **POWER**

Voltage Current





Vector





**Energy** 

Digital Signalling



Power Calculation	P, Q, S, PF, cos phi, D, DH, QH
Frequency	10 sec, AVE, MIN, MAX
Voltage, Current	RMS, AVE, MIN, MAX, ½ Period-values, 200ms, 10s, 10min
Energy	Total, positive, negative (P, Q, P+, P-, Q+, Q-)
Efficiency	DC / AC, U-I Curve for PV
Wiring	DC, 1-Phase, 2-Phase, 3-Phase Star and Delta

#### **WAVEFORM & TRANSIENTS**

Transiente Resonanzen Oszillationen Schaltvorgänge DC Offset Überspannung Unterspannung

MIN, MAX, RMS, AVE	U, I, P, Q, S, f, PF, phi, THD, Harmonics, Interharm., Unbalance, etc.
ENVELOPE / WINDOW	U, I
DELTA	dU, dI, df, dP, etc.
DERIVATE (RATE OF CHANGE)	dU/dt, df/dt etc per ms, number of periods or half-period
COMBI-TRIGGER	Combination of triggering including mulitple conditions
VOLTAGE SIGNALLING	Threshold
RAPID VOLTAGE CHANGES (RVC's)	dU, dc, dt
EN50160	Trigger on any EN50160 parameter (Max, Quantil)

### **COMPLYING STANDARDS**

#### **POWER QUALITY, HARMONICS, FLICKER:**

IEC61000-4-30 Ed. 3 Class A / IEC61000-4-7 / IEC61000-4-15 / IEC62586-2 Ed. 2 / IEC62586-1

#### **PUBLIC GRID, RAILWAY AND INDUSTRY**

EN50160 / EN50163 / IEC61000-2-2 / IEC61000-2-4 (Class 1; 2; 3) / IEEE519 / IEEE 1159 / IEC61000-2-12 / NRS048

#### WIND POWER, RENEWABLES AND GRID CODES

IEC61400-21 / IEC61400-12 / FGW-TR3 / VDE N-4105 / VDE N-4100 / VDE N-4110 / D-A-CH-CZ / BDEW / ROCOF / IEEE C37.118-2005 (PMU)

#### MOTORS, TRANSFORMERS AND ELECTRICAL EQUIPMENT

IEC60034 / IEC 60076-1 / IEC61000-3-2 / IEC61000-3-3 / IEC61000-3-11 / IEC61000-3-12

## CLASS A++




#### **POWER QUALITY**

Harmonics Interharmonics Supraharmonics Flicker Unbalance Voltage Variations

according to IEC 61000-4-30 Ed.3 and IEC 62586	
Harmonics (Voltage, Current, Phi, Power)	Class A
Interharmonics	Class A
THD U, THD I	Class A
Higher Frequencies (200Hz band)	2 - 9 kHz (can be calculated from 0 to definable upper limit)
Higher Frequencies (2000Hz band)	20 kHz for voltage and current
Symmetrical Components & Unbalance (Pos-, Neg- and Zero Sequence)	Class A
Rapid Voltage Changes	Class A
Flicker (PST, PLT, Pinst)	Class A
<b>Voltage Events</b> (dip, swell, interruption – time, extrema, length)	Class A
Frequency	10 sec, AVE, MIN, MAX
Voltage, Current	RMS, AVE, MIN, MAX, ½ Period-values, 200ms, 10s, 10min
Time Synchronisation	Class A

#### **DISTURBANCES AND SYSTEM DYNAMICS**

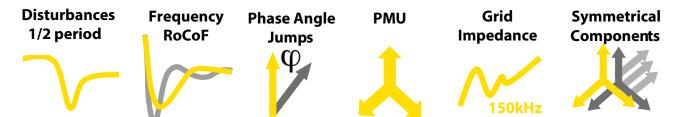

1/2 PERIOD TRIGGER	U, I, P, Q, S, f, PF, phi, THD, Harmonics, Interharm., Unbalance, etc.	
PHASE ANGLE TRIGGER	phi	
SYMMETRICAL COMPONENTS	Pos., Neg., Zerosequence	
RATE OF CHANGE FREQUENCY (ROCOF)	df/dt	
Phasor Measure Unit (PMU) according to IEEE C37.118	Total Vector Error 0.01% (typ.) Angle Error 0.003°(typ) Timestamp Accuracy 0.1 µs	
according to IEEE C37.116	up to 50 fps / via TCP / open PDC format / Offline storage possible	

#### **ADDITIONAL FEATURES INCLUDE**







# GRID IMPEDANCE ANALYZER

150 kHz / 450 kHz





**Power Quality** 



**Grid Impedance** 



#### **Resonance Detection**

Series resonances -> High Harmonic Voltages Parallel resonances -> High Harmonic Currents

#### **Grid Codes**

Assessment of harmonic emission limits according to national grid codes (DACH-CZ, TOR, TAR, etc.)

#### **Power Line Comm. (PLC)**

Troubleshooting (e.g. Detection of signal loss) for CENELEC A,B,C,D / FCC / ARIB / EPRI

#### **Mobile Operation**


Battery powered by PQA8000H for up to 4 hours Perfect for long- and short term measurement

www.neo-messtechnik.com


## GIA1/GIA3




## Grid Impedance Measurement up to 150 kHz / 420 kHz

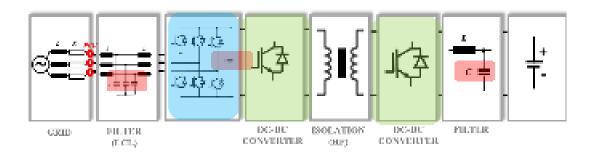

## **Single Phase - GIA1**

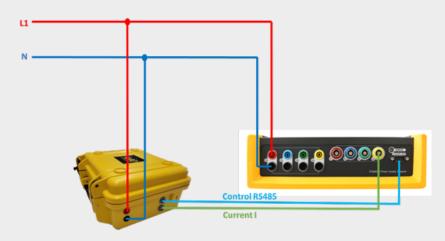

## Three Phase (star or delta) - GIA3

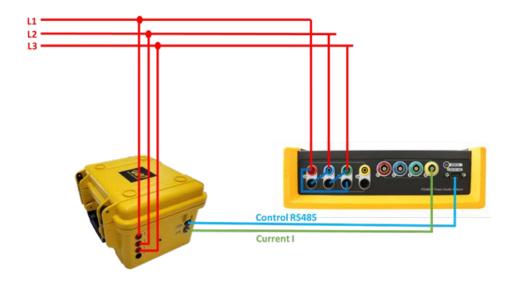




## **Applications**


## **Use Case 1: Resonance Detection & Grid Codes**

The high penetration of distributed generation and modern electrical devices based on active power electronics are causing significant changes in the higher frequency grid impedance. The additional inductances and capacitances (LCL filter, DC link etc.) causes multiple parallel and series resonances. Effects are high harmonic currents, high harmonic voltages, overheating of devices, noise, additional losses or malfunction of equipment or malfunction of digital communication.



Grid codes (for example DACH-CZ, TOR, TAR) first time allow the consideration of resonance factors for the determination of harmonic emission limits for each individual harmonic.

- Definition of Harmonic Emission limits considering resonance factors
- Optimization of inverter control (Wind, PV, Motor etc.), filter (EMC) and reactive power control

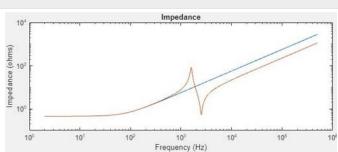

Picture 1: Example of connecting a V2G charging station
(Source Grasel 2023 The impact of V2G charger to the frequency dependent grid impedance CIRED Rom)

Reference Grid

V2G charger connected

Picture 1 shows how resonance points appear while con-


necting a V2G charging station. Note: Even if the charging station is not in operation, resonance points are caused due to the LCL input filter.

tors


## **Use Case 2: Supraharmonic Propagation**

Supraharmonic emissions in the range of 10 kHz to 500 kHz due to active power electronics such as Photovoltaics, Electric vehicle chargers, Wind power, heatpump and others

Propagation of Supraharmonics Examples
Case 1) within a customer facility
Case 2) to transformer station (e.g. up to 16 km)
Case 3) to non-active electric vehicle charging station

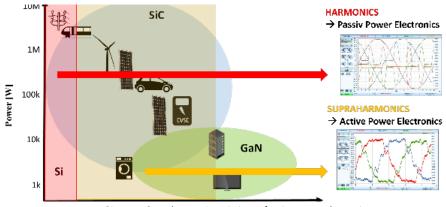

Picture 3: Supraharmonic emissions of active power electronics (Source: Grasel 2021)

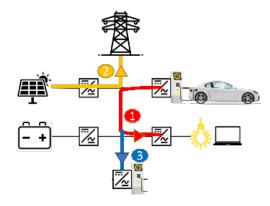


Picture 4: Exemplary Propagation of Supraharmonic

## **Use Case 3: Power Line Communication (PLC)**

Power Line Communication (PLC) is widely used for Smart Metering applications in a frequency range from 10 kHz to 450 kHz (CENELEC A, B, C, D, FCC, ARIB). Existing power cables are used for communciation purposes but represent a "harsh" medium. Communciation failures are resulting due to:

- Increasing Supraharmonic emissions causing a Noise floor
- Series Resonances (e.g. LCL input filter of other devices) representing a low-impedance path for intentional emissions
- Attenuation between transmitter and receiver

Picture 2 shows the relation between transmitted signal and grid impedance

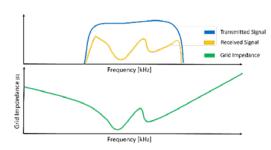

Picture 2: Relation of PLC transmission losses and higher frequency grid impedance

## **HARD- & SOFTWARE**



Time- and frequency dependent characterization of the grid impedance

				•		- 1	
Dept. Tale	Miles.	700	200 30	matrix.		200	-
Mark Co. St.	10	Perit	red.	w.	Per J	(194)	105
100	AAONE	Trans.	7996	Allerine	11700	TORK.	40.00
F 10	1.67 (87)	1.699	760	4,17909	record.	1900	4778
- BEE 110	Minde -	11,550*	rive	APRIM	100000	Hard	45.00
100	1500	51996	1736	ATOMIC	10,000	796	4723
B28	1800	111000	17798	14000	CHOICE	Hele	4767
AT 100	16079	34,007	1796	A-75076	MATERIA.	11960	4,7600
	14000						1000
100	160%	11000	70.00	ump	8754	1100	LINE
	1 hours	and the same	1000	1,000	P COL	140	Loan
- Table 1975	1897	4,500	1 feeting	4 Te(10)	M-Diere	Helt	37700
	14972	1,000	100	12960	PUNING	1/40	4,000
140	Man	4700	790	Linn	Billion .	750	1,670
_ 86	The sail	1 Utes	700	1000	71000	750	5200
E 117	ARMS	NAME.	rein	4.0000	Street	1790	3490
100	A TYPE	2,719	1708	1760	the total	1965	4,1000
-	1.4400	71,6000	1746	48947	neight.	1760	4367
* 1							-
<b>5</b> 0				1			<u>.</u>
ACQUINING	<b>V</b> //					19700	-
		1	1	1	les.		10
	1	24	1	273	10		
m	22	11	AM	IIIM	73	100	
- 30							
.3	Tal	ANG	ωN	$\mathbf{H}_{\mathbf{k}}$	4	S .	
	M	N	W,	16	1	31	
	M	W		W.		1	
	M	W				11	и
	M	W				1111	20
	The same	W				1111	100
	Table	### OFFICE   1979   197	Table Vie	Table View	Table View	Table View	Table View

3D Chart

Specifications	
Measurement Range	230 V / 400 V / ( Option 690 V)
Safety Category	CAT IV 300V (Option 600V)
Frequency Range	up to 150 kHz (Option 450 kHz)
Nominal Frequency	50 Hz / 60 Hz / 16.7 Hz
Resolution	18 bit
Signal-to-Noise Ratio (SNR)	>100 dB
Measurement time	400ms per Excitation
Max. Current	5A rms
Wiring	L-N / L-L (Option: 3-Phase)
Battery	4 hours (powered by PQA8000H)
Export	CSV, RAW, JPG
Weight	2 kg
Dimensions (LxBxH)	265 x 255 x 125 mm



#### PERFECT EXTENSION FOR PQA8000H





# POWER QUALITY MONITORING

## **OVERVIEW**

#### **PQM 100**

Key Features Input Modules Specifications


## **PQM 200**

Key Features Input Modules Specifications



## **OVERVIEW**



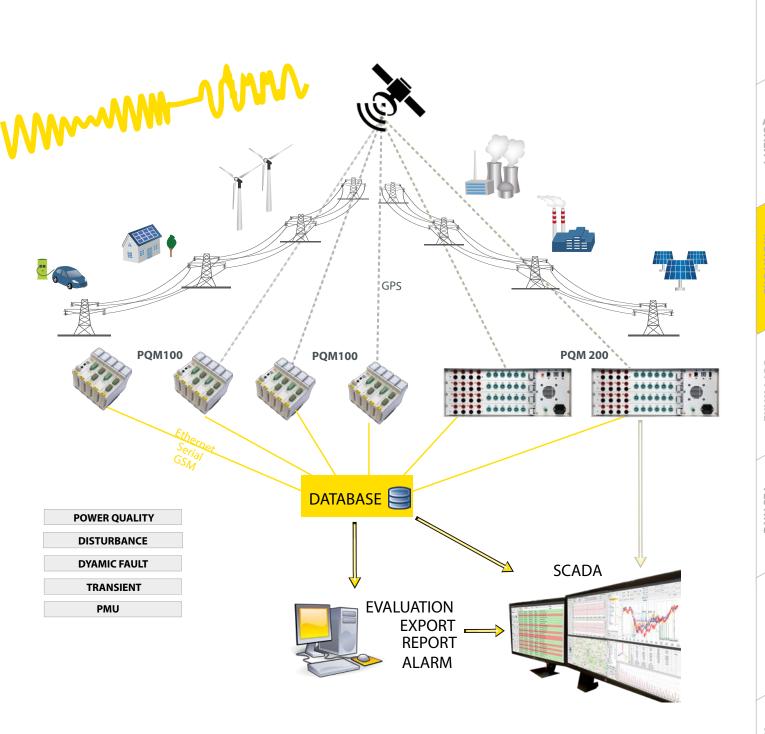



# POWER QUALITY MONITOR

# **PQM 100**











#### **Power Quality**

Harmonics, THD Supraharmonics, Symmetrical components etc.

#### **System Dynamics**

Phasor Measure Unit (PMU), Rate of Change of Frequency (RoCoF), WAMS, etc.

#### **Transients**

1/2 period values, Phase Angle jumps, Resonances, Switching etc.

#### **Power**


Active, reactive, apparent power, PF, harmonic power, energy, etc.

ACCURACY
SAMPLING RATE
RESOLUTION
SAFETY CATEGORY
MODULAR SYSTEM

0.1% 16kS/s or 32kS/s 24bit CAT IV 300V up to 64 ch

## **PQM 100**



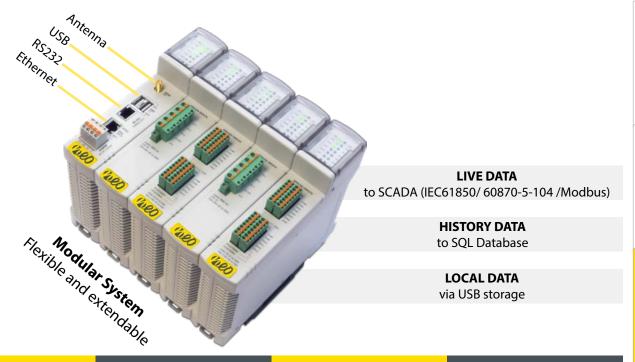

#### **HYBRID DATA STORAGE**

Even if the connection is lost all data are stored locally and will be transmitted after reconnection.

#### **DATA ON-DEMAND**

All data can be transferred continuously or just triggered on demand.

#### **REMOTE CONFIGURATION**

The instrument can be configured remotely or locally. Either option also can be disabled.

#### **REMOTE LOCATION**

All data can be transmitted via Ethernet and via a GSM connection.

TECHNICAL SPECIFICATION	DNS
Operating Temperature	- 25°C up to + 60°C
Storage Temperature	- 30°C up to + 80°C
Humidity	< 95%, no condensation
Nominal Voltage Input	24V DC
Nominaloperationinputcurrent / power	0,5A / 12W (max. 1,5A / 36W)
Protection	IP20
Power Quality	Class A (according to EN61000-4-30 Ed.3)
Dimensions	180 x 120 x 158 mm (h x w x d)
Weight	1.5kg
Interfaces	Ethernet, USB, Serial Port, RS232(e.g. for reading data of revenue meter)
Data File Format	.csv (for local storage)

## **SPECIFICATIONS**







PQM-100 is based on modular architecture, allowing combination of one CPU module and up to 6 selected input modules into one device. The input modules are providing input signal isolation, filtering and A/D conversion. The CPU module is equipped with FPGA real-time controller for the calculation of all parameters and to provide all interfaces and data storage.

CPU MODULE	
CPU	CPU module (667 MHz dual-core, FPGA, real-time OS) with 8-32 GB SD card, Ethernet, serial port, USB for data download and direct PC connection, 24V DC (power supply not included)
OPTIONS	- PQM100-CPU-GPS: extended with an integrated GPS receiver
OPTIONS	- PQM100-CPU-GPS-F: extended with a fiber optic interface for GPS

#### **INPUT MODULES**

All analog input mo	dules are providing 24 bit sigma-delta A/D conversion.
HV4	4 channel high voltage input module, 300V RMS range (measuring up to 600V RMS), 16 kS/s or 32 kS/s per channel, 6kV isolation, CAT IV 300V, $1M\Omega$ Input Impedance
HV4LV4	4 channel high voltage input module, 300V RMS range (measuring up to 600V RMS), 16kS/s or 32 kS/s per channel, 6kV isolation, CAT IV 300V, $1M\Omega$ Input Impedance 4 channel low voltage input module, $1V$ RMS range,
	16 kS/s per channel, 2.5kV isolation
LV16	16 channel low voltage input module, 1V RMS range, 16kS/s per channel.
LVIO	2 channels can be switched to temperature measurement with PT1000
LV8	8 channel low voltage input module, 1V RMS range, 16 kS/s per channel
LA5-1	5 channel current input module, 1A RMS range, 16 kS/s per channel
LA5-5	5 channel current input module, 5A RMS range, 16 kS/s per channel
DIO	8x Digital Input (24 V DC, galvanic isolated, CAT III 150V) 4x Digital Out (Relays, 8A/250V AC, galvanically isolated, CAT III 300V)

# **PQM 100**



#### **TURNKEY SOLUTIONS**


We can provide turnkey solution for your project. After discussing the requirements, we will create a specification book including plans (circuit plan, item list, etc.) and schematics.

After approval you will receive your turnkey measurement solution. One example is shown in the picture. In addition to the measurement instrument, other electrical equipment such as a power supply, protection, wiring etc. is provided in a cabinet.



#### **PQM-SCADA**

PQM-SCADA is the enterprise management software for Power Quality Analyzers. PQM-SCADA software shows real-time data of all the PQ instruments as well as historical data stored in a central server or cloud storage. Data visualization, data analysis, report generation (EN50160), and notifications are just a few of the powerful features of PQM-SCADA software.

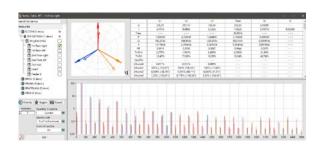

# **PQM MONITORS**


# PQM 100 PQM 200

Accuracy	0.1%	0.05%
Sampling Rate	16kS/s or 32kS/s	144kS/s
Resolution	24bit	24bit
Safety	CAT IV 300V	CAT IV 600V



# **POWER QUALITY MONITOR**

# **PQM 200**

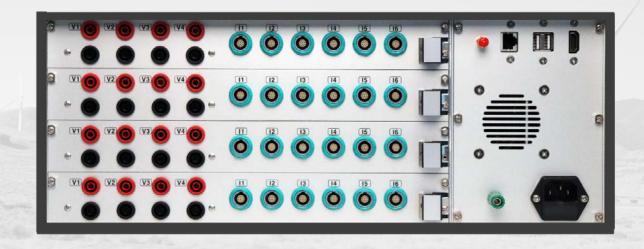









#### **Power Quality**

Harmonics, THD Supraharmonics, Symmetrical components etc.

#### **System Dynamics**

Phasor Measure Unit (PMU), Rate of Change of Frequency (RoCoF), WAMS, etc.

#### **Transients**

1/2 period values, Phase Angle jumps, Resonances, Switching etc.

#### **Power**

Active, reactive, apparent power, PF, harmonic power, energy, etc.

**ACCURACY SAMPLING RATE RESOLUTION SAFETY CATEGORY MODULAR SYSTEM DESKTOP or RACK-MOUNT** 

0.05% 124kS/s 24bit CAT IV 600V up to 40 ch

# **PQM 200**





#### **LIVE DATA**

to SCADA (IEC61850/60870-5-104/Modbus)

#### **HISTORY DATA**

to SQL Database

#### **LOCAL DATA**

via USB storage

#### **HYBRID DATA STORAGE**

Even if the connection is lost all data are stored locally and will be transmitted after reconnection.

#### DATA ON-DEMAND

All data can be transferred continuously or just triggered on demand.

#### **REMOTE CONFIGURATION**

The instrument can be configured remotely or locally. Either option also can be disabled.

#### REMOTE LOCATION

All data can be transmitted via Ethernet and via a GSM connection.

PQM-200 is a computer-based Power Quality Monitor with up to 48 input channels. It combine functionalities of a Power Quality Monitor, Disturbance Recorder, Power Fault Recorder, Transient Recorder, Phasor Measure Unit (PMU) and high precision energy meter. The input modules are fully-isolated (isolation voltage 6kV) and provide a synchronized sampling rate of 144 kS/s per channel and 24 bit resolution. An Automatic Anti-Aliasing filter together with extremely low-noise ensures signal quality and signal processing.

COMPUTER BOARD		
СРИ	Intel i5 or i7 (optional) 8GB RAM (optional 16GB or 32GB) 1TB HDD (optional 256GB SSD + 2TB HDD)	
OPTIONS	OPTIONS GSM modem (integrated) GPS Antenna	
INPUT MODULES		

#### Each instrument can be equipped by 4 input modules

4HV4LV	4 channel high voltage input module 1600V 4 channel low voltage input module up to 10V (Clamp or Rogowski) Optional: 1x CAN2.0B and 1x RS485 Interface Optional: 8x Digital In and 2x Digital Out	
4HV4LA	4 channel high voltage input module 1600V DC 4 channel current input module up to 5A rms (max. 20A) Optional: 1x CAN2.0B and 1x RS485 Interface Optional: 8x Digital In and 2x Digital Out	
4HV6LV	4 channel high voltage input module 1600V 6 channel low voltage input module up to 10V (Clamp or Rogowski)	
4HV6LA	4 channel high voltage input module 1600V DC 6 channel current input module up to 5A rms (max. 20A)	
16DI16DO	16x Digital input and 16x Digital output 1x CAN2.0B, 1x RS485	



<b>HIGH-VOLTAGE</b>	(HV)	INPUT 9	PECIFICATION
IIIGII-VOLIAGE	v <i>i</i>	1141 01 2	

Measurement Range	1600V
Accuracy	0.05%
Safety and Isolation	6kV isolation (60 sec) CAT III 1000V / CAT IV 600V
Sampling Rate	124kS/s per channel (selectable)
A/D Conversion	24 bit sigma-delta A/D conversion with an automatic Anti-Aliasing Filter
Bandwidth	70kHz (Alias-free)
Input Impedance	3.8MOhm
Connector Type	Banana, Screw Terminal

#### **LOW-VOLTAGE (LV) INPUT SPECIFICATION**

Measurement Range	2mV, 20mV, 200mV, 1V, 2V, 5V, 10V
Input Type	Clamp or Rogowski (Integrator inside instrument)
Accuracy	0.05%
Sampling Rate	124kS/s per channel (selectable)
A/D Conversion	24 bit sigma-delta A/D conversion with an automatic Anti-Aliasing Filter
Bandwidth	70kHz (Alias-free)
Input Impedance	10MOhm
Excitation Voltage	±15V /12V / 3.3V
Connector Type	LEMO, DSUB9

#### **CURRENT (LA) INPUT SPECIFICATION**

Measurement Range	5A rms (max. 20A peak)	
Accuracy	0.05%	
Sampling Rate	124kS/s per channel (selectable)	
A/D Conversion	24 bit sigma-delta A/D conversion with an automatic Anti-Aliasing Filter	
Bandwidth	70kHz (Alias-free)	
Connector Type	Screw Terminal	

#### **DIGITAL IN / OUT SPECIFICATION**

Digital In	1kV isolation / adjustable trigger levels
Digital Out	PhotoMOS Relais, 350Vp / 0,12A
CAN 2.0B	1kV isolation
RS-485	1kV isolation

#### Modular




**Exemplary Configurations with different types of connectors** 



TECHNICAL SPECIFICATIONS		
Operating Temperature	$0^{\circ}$ C up to + 50 °C (32°F to 122°F)	
Storage Temperature	-20°C to + 80°C (-4°F to 176°F)	
Humidity	< 95%, no condensation	
Nominal Voltage Input	85-264V AC / 47-63Hz	
Protection	IP20	
Power Quality	Class A (according to EN61000-4-30 Ed.3)	
Dimensions	19" 4x height units 170 x 484 x 381 mm (h x w x d)	
Weight	8.8kg	
Interfaces	Ethernet, USB, WiFi, Bluetooth, RS232(optional)	
Data File Format	.csv (for local storage)	

We are also happy to send you a hard copy of the catalog. Just send us an email to sales@neo-messtechnik.com

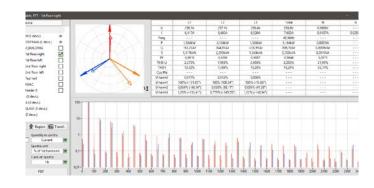



Accuracy	0.1%	0.05%
Sampling Rate	16kS/s or 32kS/s	144kS/s
Resolution	24bit	24bit
Safety	CAT IV 300V	CAT IV 600V



# **POWER QUALITY**

#### **POWER**

**Transients** 

Reactive Voltage **Power Vector Energy Digital Current Power** Signalling

Power Calculation	P, Q, S, PF, cos phi, D, DH, QH
Frequency	10 sec, AVE, MIN, MAX
Voltage, Current	RMS, AVE, MIN, MAX, ½ Period-values, 200ms, 10s, 10min
Energy	Total, positive, negative (P, Q, P+, P-, Q+, Q-)
Efficiency	DC / AC, U-I Curve for PV
Wiring	DC, 1-Phase, 2-Phase, 3-Phase Star and Delta

#### **WAVEFORM & TRANSIENTS**

Resonances

**Switching DC Offset** Overvoltage **Undervoltage Oscillations** MIN, MAX, RMS, AVE U, I, P, Q, S, f, PF, phi, THD, Harmonics, Interharm., Unbalance, etc. **ENVELOPE / WINDOW** U, I **DELTA** dU, dI, df, dP, etc. **DERIVATE (RATE OF CHANGE)** dU/dt, df/dt etc. ... per ms, number of periods or half-period **VOLTAGE SIGNALLING** Threshold EN50160 Trigger on any EN50160 parameter (Max, Quantil)

#### COMPLYING STANDARDS

#### **POWER QUALITY, HARMONICS, FLICKER:**

IEC61000-4-30 Ed. 3 Class A / IEC61000-4-7 / IEC61000-4-15 / IEC62586-2 Ed. 2 / IEC62586-1

#### **PUBLIC GRID, RAILWAY AND INDUSTRY**

EN50160 / EN50163 / IEC61000-2-2 / IEC61000-2-4 (Class 1; 2; 3) / IEEE519 / IEEE 1159 / IEC61000-2-12 / NRS048

#### WIND POWER, RENEWABLES AND GRID CODES

 ${\sf IEC61400-21 \, / \, IEC61400-12 \, / \, FGW-TR3 \, / \, VDE \, N-4105 \, / \, VDE \, N-4100 \, / \, }$ VDE N-4110 / D-A-CH-CZ / BDEW / ROCOF / IEEE C37.118-2005 (PMU)


#### MOTORS, TRANSFORMERS AND ELECTRICAL EQUIPMENT

IEC60034 / IEC 60076-1 / IEC61000-3-2 / IEC61000-3-3 / IEC61000-3-11 / IEC61000-3-12

# **CLASS A**



# **POWER QUALITY**

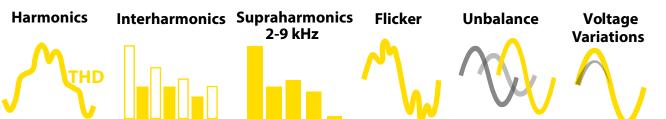


according to IEC 61000-4-30 Ed.3 and IEC 62586		
Harmonics (Voltage, Current, Phi, Power)	Class A	
Interharmonics	Class A	
THD U, THD I	Class A	
Higher Frequencies (200Hz band)	2 - 9 kHz (only PQM 200)	
Higher Frequencies (2000Hz band)	-	
Symmetrical Components & Unbalance (Pos-, Neg- and Zero Sequence)	Class A	
Rapid Voltage Changes	Class A	
Flicker (PST, PLT, Pinst)	Class A	
<b>Voltage Events</b> (dip, swell, interruption – time, extrema, length)	Class A	
Frequency	10 sec, AVE, MIN, MAX	
Voltage, Current	RMS, AVE, MIN, MAX, ½ Period-values, 200ms, 10s, 10min	
Time Synchronisation	Class A	

#### **DISTURBANCES AND SYSTEM DYNAMICS**


Disturbances	Frequency	Phase Angle	PMU
1/2 period	RoCoF	Jumps	
		φ	

1/2 PERIOD TRIGGER	U, I, P, Q, S, f, PF, phi, THD, Harmonics, Interharm., Unbalance, etc.
PHASE ANGLE TRIGGER	phi
SYMMETRICAL COMPONENTS	Pos., Neg., Zerosequence
RATE OF CHANGE FREQUENCY (ROCOF)	df/dt
Phasor Measure Unit (PMU)	Total Vector Error 0.01% (typ.) Angle Error 0.003°(typ)
according to IEEE C37.118	Angle Error 0.003°(typ) Timestamp Accuracy 0.1 μs
	up to 50 fps / via TCP / open PDC format / Offline storage possible

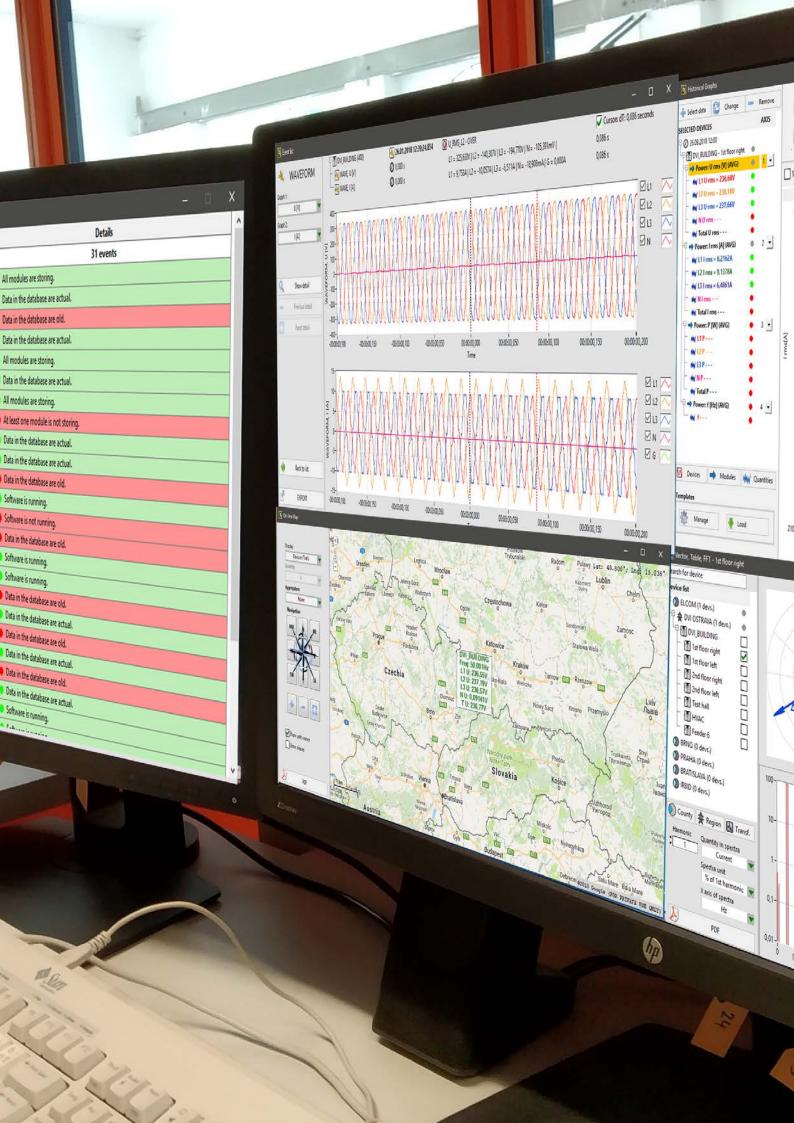

# 

# DATABASE SCADA & CLOUD

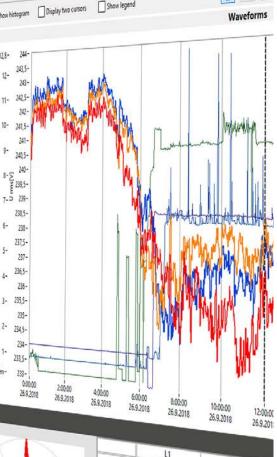

L A		L1		
	U	236,3V	L2	
4	1	6,417A	237,1V	
XXX	Freq.		9,680A	
	P	1,504kW	7,0004	
	Q	1,304KW	2,134kW	
	_ \$	192,2VAr	844,8VAr	
	PF	1,517kVA	3 3051V	
	THDU	0,9919	2,295kVA	
	THDI	2,275%	0,9298	
	Cos Phi	12,42%	1,993%	
8	Uharmo		7,388%	
	U harm1	0,011%	,,,	
11	U harm2	100% (-121	0,012%	
	U harm3		100% (100 -	
		1,25% (-153,41°)		
		7.11)	0,779% (-145,53°)	
	1			
0 300 400 500 6	00 700	900 1000	1100 1200 1300	

#### **PQM SCADA SOFTWARE**

Introduction Connectivity Overview

Live Data

History Data

PQ Report (EN50160)

**Transients** 

Events, Alarm

Disturbances

Supervision


**Cloud Option** 

**Additional Features** 

# **OTHERS**

Wide Area Monitoring (WAMS) Phasor Measure Unit (PMU) Energy Monitor





#### INTRODUCTION

PQM-SCADA is the enterprise management software for Power Quality Analyzers and Disturbance Recorders. PQM-SCADA software shows real-time data from all the PQ instruments as well as historical data stored in a central server or cloud storage.

Real-Time Data

Historical data


Multiple Visualization

Automatic Report Generation (EN50160)

Notifications, Alarm, Email, SMS

Remote meter configuration

User Management tool

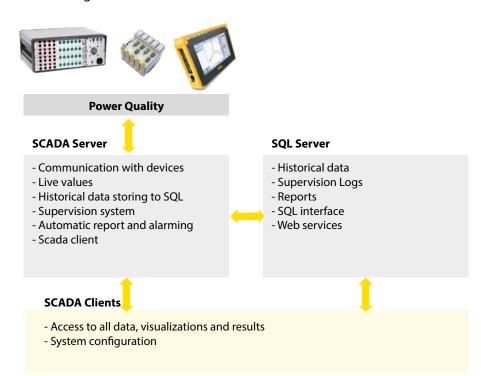

This central software can communicate with hundreds of instruments, and can support third party PQ meters (if documentation is provided). Data migration from existing data bases is possible as well as interfaces. Typical usage of PQM-SCADA is to monitor power quality and other parameters of the transmission or distribution grid.

#### **CONNECTIVITY & INTERFACES**

The PQM-SCADA system can communicate with other systems, and can also provide data to any third party system. The User Management tool allows an unlimited number of users to be added with different access and security levels.

# **PQM SCADA**



#### **OVERVIEW**

This PQM-SCADA enterprise is an easy-to-use software solution which allows the user to visualize live-data, historical data or reports. The multi-screen capability gives the user the ability to design their own visualization screens including the use of multiple monitors. User-management with different access and security levels is integrated.... even the possibility to give your customers access to view limited data. The following picture shows the Overview & Configuration menu.




#### **LIVE DATA**

All visualizations are flexible and can easily be configured (parameters, colors, etc.). All graphs can be shown simultaneously.


#### **TABLES**




#### **VECTOR / HARMONICS**

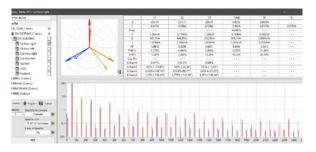

#### **SUPERVISION**

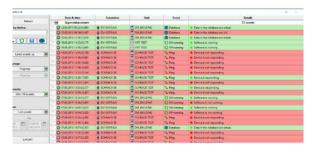

#### **GRAPHS**

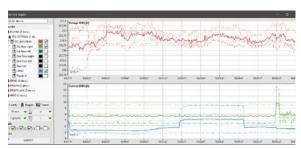

#### LAST TRANSIENT / DISTURBANCE



#### **MAPS**





# **DATA ANALYSIS**


#### **HISTORICAL DATA**

The powerful analysis capabilities allows for comprehensive data analysis inside the enterprise software.

#### **GRAPHS**



#### **FFT**

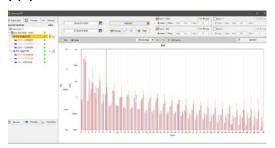


#### **HISTOGRAM**




#### **EVENT LIST**



#### **ENERGY**

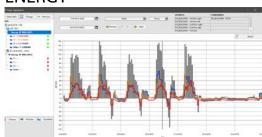

#### TRANSIENTS / WAVEFORM

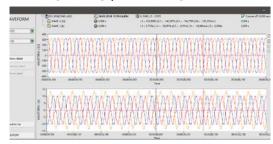

#### **AUTOMATIC EN50160 REPORT**

	Spinytry .	1947	midney.	Mel mouth file	color frequent, by	MY/AGE/AR	0.00	
Per Medi	Contrast.						1	
Manufacture (M. Manufacture)	The state of the s			4			V.	
O MAIN	And Tongomery 80-70;	84.0%	Me	MARKET SETTING 1 18079			1	
All land	My Frigure (1975)	W0-045	154	#18F4:70794/19075			1	
Station State	- Mr Fagurio W.Ph.	10.65	His	18.68% / SETEN / 180.0%			V	
	my hispanics 40 Ph	1-8%	10+	48,664,191,194,119576			1	
	Mr Fragment 1975	~ 96	He	Halley Willey Hally			4	
NY BUILDING	Ar Traperty 1975	1+975	791	694/3094/3095			1	
	C Distance at 19800			41	The second second	10	4	
NAME OF TAXABLE PARTIES.	Mr Integration	99,105	None.	28/91/2m/30/1909	(2640-156)(611105)	25/51 (Medit / 1875)	4	
(ME NOTE OF	Without 1815.	PH (PP)	Nee	29/29/29/29/29/2	201401-124029-11079	(20) 701 (200,475,11075)	1	
	Distant.			The second second	THE RESERVE OF THE PERSON NAMED IN	44	4	
arrest .	T APRICE.	118	Non.	0.76,75.40,/380.0%	1.001.0,0110079	\$18 1 h h 1 40 Ph 1	1	
	- Artel etc		10 mm	270 Tel 1975	0.0,540 (4076)	sectores.	1	
	Chindren C			THE RESERVE OF THE PERSON NAMED IN			1	
	ACTION AND ADDRESS OF THE PARTY NAMED IN	141/5	16 ion	10/3/10/05/10005			1	
	- Elsen			W.		7.18	V	
	W NOVEM	10175	Ti esti	105047909	\$155 EM 196,00	1,000 091 100 000	V	
	To Dispute 2			No. of the last of	THE RESERVE OF	10	1	
	and a Discourage			Latte coar I decrees	(365 ba) 16,005	CONTINUE INCOME.	1	
	Diameter l'illiane			88	W.	18	1	
	Mr and direction		15.00	TRITING TOUR	TREATMENT TO THE	menod rem	1	
-	Water fields fire.	4479	9 mm	ARREST STATE	\$30 per 1967s	Authory Mark	1	
Dress Street	Mary Print (China) (1975).	1176	None.	Citizen (473)	Street Mich.	120 mm (8/8)	1	
Point Street	W THE CODE ON	1479	Ti em	SATIMATINES.	10 let   10.05	101104-1005	1	
Pini Pierwill	TO BE STATE OF THE	4175	fire	0.000 w 0.000	14041976	(Moving)	1	
Street, Street, C	Ag 1-0 (Director)	1176	No.	Silver Web	57 Set 1676	\$23 mm / 1965%	2	
Dome	₩ 314° (2094) 97%.	1176	7000	1.004/609	LOUGH PLOT	127 pag 19676	1	
	With High Str.	41/9	9.00	SATISFO TRANS	\$5.00 M/A	\$14.047.00%	2	
O. house	My probability des.	11/9	0.00	1,010,010,010	Little of Pa	1000.00	2	
	WYNE SERVER	1176	tion.	8.0'(ser) 1900%.	\$10 mg 1900h	Attion 1987s.	4	
of tases	T WYST CONGRES	1179	Time	\$55 per 19679.	1814/10h	\$18 Sept / 1950/5	1	
	MET THE STREET, THE	1175	10.00	5, Waler 18655	\$2504150P	411 Sept. 10075	1	

#### **EVENT STATISTICS**

tervali	STATISTICS (264)		ALA (2)	5016	OPQ-EVE (2)	TRA	WAVE (264)	1 1/2	DES (0)		CUST (E)
Selected interval	2 sevo		200220	05000	TO SECURE	2000	CONTRACTOR OF THE PARTY OF		100000		100000
90,00,00 15,12,00 -	<b>Энсом</b>				2		264		-		-
E3820W 253820W	<b>★</b> DALCALIMANA		-		2		264		-		-
	TO DVI, BUILDING (SO.		100		2		264		-		1
BANKHII AI NA	T 20.30.5018	141	1100	D -	2	150	-	10	-	5	-
u u u beloc	TR 03.20,2028		100	D	900	8	174	59	-	60	-
a la la segue	78 ps 20 2020	-	100	D	100	FP.	2	9		6	-
Refroit	T 28 05.50,2018	44	T. delan	-	-	60	28	53	-	6	-
	TB 15.55,5018	141	***	12	100	(9)	2	tel	- 100	Se	-
€ County	Manage .	-	446	-	les .	1		69	- 000	16	-
# Negron	Эшис		-		-		-				-
@ transf.											
ES Days											
Stock details dialog											
804											

### **ADDITIONAL FEATURES**

There are additional features such as alarms, notifications, emails and SMS services. All PQM and PQA meters can be configured remotely (firmware, software, configuration etc.). This powerful system monitors each device status and its fault state. The supervision overview distinguishes between two states: OK and Failed. Some of the functions available for monitoring include: ping, sw running, data storing, data in the database, etc.

# **APPLICATIONS**



#### PMU - PHASOR MEASUREMENT UNIT

**Highest Precision Synchrophasor Measurement** 

PMU - The Phasor Measurement Unit is a device for accurate synchrophasor measurements. The measurement results are used for the online detection of the electrical grid status. This principle is based on comparing the phase angles of the fundamental harmonic measured at different points of the distribution or transmission network using several devices at synchronized points in time.

#### **High-Accurate GPS Receiver**

The meter has to be equipped by the internal/external GPS for receiving synchronous timestamps.

#### **Additional Sensor and Range calibration**

The additional sensor and measurement range calibration (see chapter PQA8000 calibration) enables for highly accurate measurement results.

#### **IEEE C37.118**

The PMU firmware measures voltage and current phasors, frequency, and calculates the positive symmetrical components of voltages and currents. The measured data is sent to the superior system according to the IEEE C37.118 communication protocol. By default, the device fully complies with the requirements of IEEE C37.118, which defines the PMU accuracy in stabilized state and a communication protocol for real-time phasor transmission.

The PQA8000 instrument offers a built-in GPS receiver together with highly-accurate voltage inputs and

- Total Vector Error 0.01% (typ.)
- Angle Accuracy 0.003° (typ.)

### **WAMS - Wide Area Monitoring System**


Phasor angle differences between various parts of the transmission grid are an indicator of grid health and can provide early warning in the case of developing power system disturbances that can lead to grid separation known as islanding, or even blackout. The accurate measurement of the phasor angles across the grid is made possible by the use of GPS-synchronized phasor-sampling clocks. Nationwide networks of time-synchronized phasor measurement units (PMUs) are called Wide Area Monitoring Systems (WAMS).

The main features of the WAMS systems are the visualization and monitoring of phasors , islanding detection, resynchronization and black start detection, oscillations detection, stability and voltage monitoring. The results can also be transmitted to SCADA



#### **ENERGY MEASUREMENT**

Meter input modules are designed to measure one 3-phase voltage and multiple 3-phase current systems. The intention of this meter is typically to monitor the distribution transformer powering multiple output feeders. The functionality of multi-feeder-monitors is similar to a PQ meter, with the possibility of measuring up to 10x the number of 3-phase feeders in total. The multi-feeder-monitor also provides detailed information about the power and energy consumption of each feeder

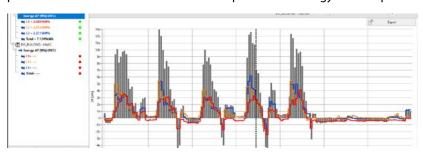




# SOLAR / PV TESTSYSTEMS







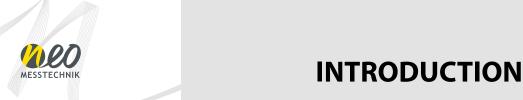

#### SOLAR PHOTOVOLTAIC POWER PLANTS

The number of solar power plants has been steadily increasing over the past years. Photovoltaic systems are known for:

- Long lifetime
- Low aging effects
- Low maintenance
- Low operating costs
- Easy Installation
- Robust

Nevertheless different kind of faults in PV systems can occour.



Performance losses of >10% within 3 years are very common



Most faults are not detectable by visual inspection



Mismatch losses of PV strings are **10x** to **100x** times higher than defect panels


#### **Faults**


Possible faults at photovoltaic panels and systems are:


- Mismatch Losses
- Hotspots
- Potential Induced Degradation
- Shading
- Bypass diode defect
- Cell Cracks
- Glass breakage
- Soiling
- Snail Trails
- Delamination
- Discoloration
- Corrsoin
- etc.

#### **Mismatch Losses**

Mismatch losses occur at serial or parallel connection of PV panels due to differing electrical characteristics. The reasons for mismatch can be: different panels, different elevation, shading, hotspots, PID, any other faults. The following picture gives an explanation of the losses due to serial (left) and parallel (right) connection:

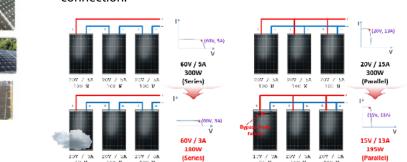

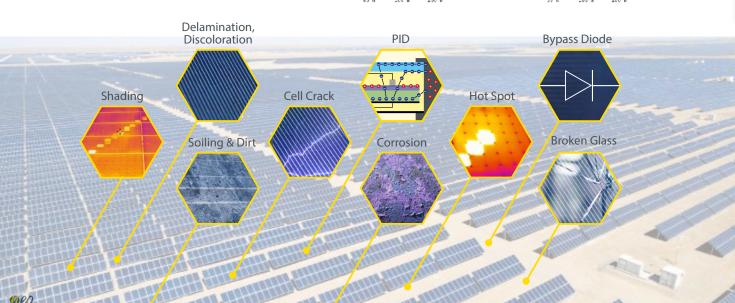





# IV CURVE TRACING



#### **Example Mismatch Losses PV park**

In solar farms usually a combination of series and parallel connection of PV panels is used in order to use the full MPP input range of inverters. Via series connection panels will be connected to a PV-String. Connecting this PV strings together via parallel connection will represent a PV-Array. If now one string of the PV-array will reduce it's output power due to any defective module or tempory shading, not only the power of this string will be reduced. The whole system voltage (parallel connection of voltage sources) will decrease and the power of the whole array decreases. In the example below the output power of the array will be reduced by 8 kW (30%) instead of 3kW (10% reduction at string) due to this Mismatch losses.

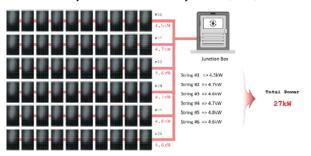

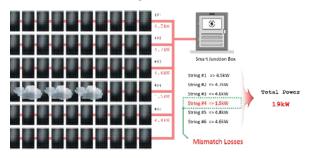

#### **Inspection Methods**

Beside visual inspection the following inspection methods are used:

#### - Thermal Imaging

This technique is most used for inspection of PV plants. It requires Know-How for execution and analysis of the measurements. Often drones are required and the power plant needs to be in full operation (heat). It allows

detection of different kind of faults and to find broken components. Nevertheless Mismatch losses and PID can not be detected.


#### - Electroluminescence

This technique is mainly done in laboratories. Modules will get activated by current injection. Measurements are done without solar radiation (by night). It allows detailed analysis of PV panels. Nevertheless mobile measurement systems are not available. The systems require high power for signal injection.



### **IV Curve Tracing**

This technique will record the voltage and current profile (IV curve) of PV panels starting at the openc-circuit voltage (Voc) to the short-circuit current (Isc). Depending of the shape of the curve, different faults can be detected.







# Introduction

### How does the PV Master unleash your solar power potential?

**Performance**: Testing ensures that PV modules, and other components perform as expected under various conditions. The PV Master assesses their efficiency, power output, and reliability.

**Safety Compliance**: Early fault detection through a combination of leakage current measurement and IV curve tracing.

# **Inspection methods**

There are already a few methods to carry out PV inspections. The ones mainly used in the field are thermal imaging and electroluminescence but since they often need a lot of time and know how to use, they aren't flawless.

Diagnosis Faults	Optical Inspection	Thermal Imaging	Electro- luminescence	1-Channel IV-Curve Tracing	Multichannel IV-Curve Tracing
PID	×	Δ	✓	✓	<b>✓</b>
Bypass open	×	×	×	✓	<b>✓</b>
Bypass shorted	×	✓	✓	✓	<b>✓</b>
Hot Spots	×	✓	Δ	✓	✓
Cell Crack	×	$\triangle$	✓	$\triangle$	Δ
Disconnection	×	✓	-	✓	✓
Snail Trail	✓	Δ	-	✓	<b>✓</b>
parallel Mismatch	×	×	×	×	<b>✓</b>
Needed Time	-	High	High	High	Low
× no detection	$\triangle$ partly detection	✓ full detection			

#### **World's only instrument to detect parallel Mismatch-Losses**

# **Exemplary faults detected by IV – CURVE**


■ Standard Test Conditions Expected curve when no damage or aging is present.

Hotspots

When solar cells within a module no longer supply current due to partial shading they heat up strongly due to the current of the other cells connected in series. In the worst case, a hot spot can lead to fires, but in any case, it results in a power reduction.

■ PID – Potential Induced Degradation PID occurs when a voltage difference prevails between panel and ground. The primary circuit thereby produces a partial voltage discharge which then results in an output power reduction.

■ LID - Light Induced Degradation The degradation of photovoltaic modules describes the reduction in performance due to aging effects. This mainly includes browning, cell bleaching blistering or cell corrosion.

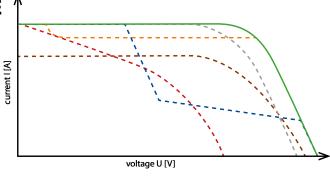

■ Bypass-Diode Breakage Bypass-Diodes can break due to production faults, thunderstorms, overheating, mechanical damage or continuous shading. When that happens the system voltage will be reduced leading to output power reduction.

Shading

Shaded modules do not only reduce the power output but also lead to bigger problems like Hotspots or breakage of the bypass diode.

# **PM-10**








# PM-10

Up to 20 strings simultaneously

The modular system of the PV Master series offers the best possible flexibility for the user. 1, 4, or 20 input channels can be connected to the device via an external switchbox.

PM-10: 1 Channel **Extension Box: Option 1: 4 Channels** 

**Option 2: 20 Channels** 

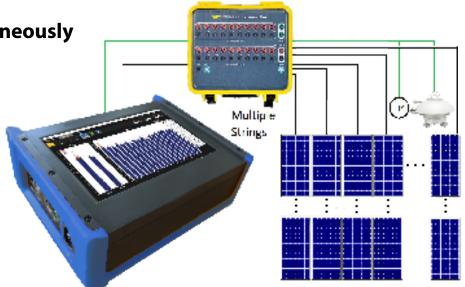

#### **PV MASTER 10**



### 1 Channel IV-curve tracing

Highly precise measurement diagnostics an report tool for PV systems.

### up to 1500 V / 30 A

Designed for high-power applications (high voltage / high current)

#### **20 CHANNEL EXTENSIONBOX**



#### **AUTOMATIC SWITCHING**

Switches automatically through all connected Channels.

20x IV-curve measurement 20x Leakage measurement

56


#### PM-10



### Why is it the world's most versatile Solar Power Plant diagnostic system?



#### The best IV-Curve Tracer

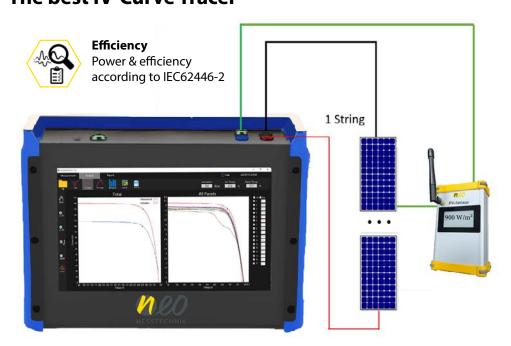

#### **Sensor Box Options:**

#### **Sensor Box Lite**

Integrated Class C Pyranometer, ambient and module temperature (PT100/PT1000)

#### **Sensor Box Expert**

- up to 2x Radiation (Pyra Class A, B or C)
- up to 5x Temperature (PT100/1000 or Thermocouple Typ K)
- wired or wireless (up to 100m)
- Touch-Screen Display and battery powered
- Bifacial Module support



# Multi-Channel IV-Curve Tracer

# **PV MASTER 70**





#### Safety

Measurement system for safety and performance check.



#### Leakage

Detection of leakage currents



#### Diagnosis

Automatic detection of Mismatch, Hotspot, PID, Shading, Bypass Diode, etc.



#### Efficiency

Power & efficiency according to IEC62446-2



Measurement of solar radiation, panel and ambient temperature and conversion to STC



Al (artificial intelligence) for automatic system diagnostic and performance

CPI	J	Intel© Processor E3940 @ 1,6 GHz			
RAI	A		8 GB		
SSI	)	2x 256GB SSD			
08			Windows 10 IoT		
Display		10.1 " TFT LC	Display(Touch), 8	00cd, 1280x800	
PC Inte	rface	2 x USB, 1 x Ethernet, 1x RS-485 1 x WiFi		485 1 x WiFi	
Channel	Voltage	20 CH(for IV c	urve) + 2 CH(for po	tential voltage)	
Channel	Current	20 CH (IV curve)			
Measurement	Voltage	1100 [V] (IV curve), 1600 [V] (potential voltage		tential voltage)	
Range	Current	40 [A] (IV curve)			
	ADC Type	Delta-Sigma ADC			
ADC	Sampling Rate	Max. 144 kS/s			
		BNC Type	1 CH	(10 V)	
Analog	Input	Thermocouple	Channel	2 CH	
		(K-Type)	Temp. Range	-100°C to 300°C	
PowerS	upply	90 ~ 250 VAC / 47 ~ 63 Hz			
Size ( Width x Le	ngth x Height)	487 x 325 x 175 mm 19.2 x 12.8 x 6.9 inch			
Temperature	Operation				

-20°C to 80°C -20°C to 80°C / -4°F to 176°F

#### **20 CHANNELS**

Simultaneous measurement and diagnostics of up to 20 strings (channels) using Time-Sync technology.

### up to 1600V / 40A

Designed for high-power applications (high voltage / high current)

#### **MOBILE OPERATION**

The integrated battery pack allows an operating time of up to 4 hours of operation.

#### **SMART TOUCH**

The 10.1 inch Smart Touch display responds immediately without any delay with intuitive operation like on a mobile phone.

Range

Storage

# Multi-Channel IV-Curve Tracer



# **PV MASTER 80**







Measurement of solar radiation, panel and ambient temperature and conversion to STC



Al (artificial intelligence) for automatic system diagnostic and performance



#### **Safety** Measurement system for safety and performance check (option)



Leakage
Detection of leakage
currents (option)



**Diagnosis**Automatic detection of
Mismatch, Hotspot, PID,
Shading, Bypass Diode, etc.



СРІ	J	Co	ore i7 - 8700 ( 3.2 G	Hz )		
RAM /	SSD	16 GB / 500GB				
os	os		Windows 10 IoT Enterprise 2019 LTSC			
Display			10.1 " Display(Touc	:h)		
PC Inte	rface	6 x USB, 1	x HDMI, 2 x Etherne	et, 1 x RS-485		
Channel	Voltage		4 CH (Max. 24 CH	)		
(1 Module, max 6)	Current		4 CH (Max. 24 CH	)		
Measurement	Voltage	1100 [V]				
Range	Current	40 [A]				
	ADC Type	SAR ADC				
ADC	Sampling Rate	Max. 1 MS/s				
		BNC Type	1 CH	(10 V)		
Analog	Input	D - SUB (9 PIN) Type	1 CH (10 V) (±12, 15, 24V External Power			
	·	Thermocouple	Channel	2 CH		
		(K-Type)	Temp. Range	-100°C to 300°C		
Power Supply		90 ~ 250 VAC / 47 ~ 63 Hz				
Size ( Width x Length x Height)		470 x 517 x 207 mm 18.5 x 20.35 x 8.14 inch				
Temperature	Operation	0°0	to 60°C / 32°F to 1	40°F		
Range	Storage	-20	°C to 80°C / -4°F to 1	176°F		

#### **24 CHANNELS**

Simultaneous measurement and diagnostics of up to 24 strings (channels) using Time-Sync technology.

#### 1100V / 40A

Designed for high-power applications (high voltage / high current)

#### **RACK MOUNT**

Ruggedized unit for both labrotary and field tests.

#### **SMART TOUCH**

The 10.1 inch Smart Touch display responds immediately without any delay with intuitive operation like on a mobile phone.




# **Software**

INTRODUCTION


#### **EASY CONFIGURATION**




#### **MULTI-CHANNEL POWER ANALYSIS**

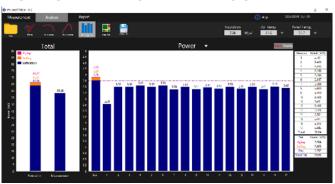

#### **MULTI-CHANNEL CURRENT**

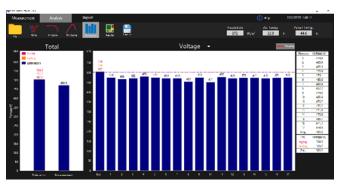

#### **MULTI-CHANNEL VOLTAGE**

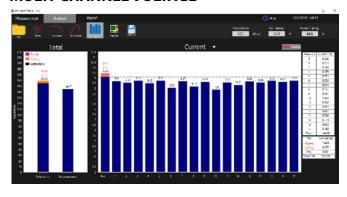





# **Highlights**



#### **MULTI-CHANNEL IV-CURVE**

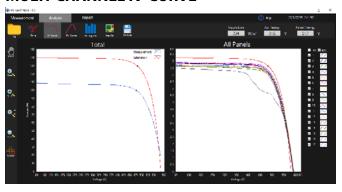

#### **MULTI-CHANNEL PV-CURVE**

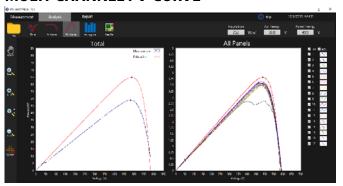

#### **AUTOMATIC DIAGNOSTIC**



#### **FAULT DETECTION:**

- Mismatch Losses
- Bypass diode breakage
- Potential Induced Degradation (PID)
- Hotspot
- Shading
- Leakage and a lot more...











#### **CURRENT MEASUREMENT**

AC Clamps
AC Rogowski Coils
AC Split-Core Sensors
AC/DC Clamps
AC/DC Split-Core Sensors
AC/DC Zero-Flux Sensors

#### **VOLTAGE MEASUREMENT**

Test Leads Adapters Dividers, Transformers

# **OTHER ACCESSORIES**






# **AC CLAMPS**

Dimensions 102 x 34 x 24 mm (Clamp Opening d = 15mm)

#### **AC CLAMPS**

#### CLAMP-5AC Type Iron-Core Range 5 A Bandwidth 20 kHz $\pm 0.5\%$ of reading (with NEO calibration typ. $\leq 0.2\%$ ) $\pm 1\%$ of reading (with NEO calibration typ. $\leq 0.3\%$ ) 0.5-6A: 0,1-0,5A: Accuracy 5mA-0,1A: $\pm 2\%$ of reading (with NEO calibration typ. $\leq 0.8\%$ ) ±0,5° ±1° 1 - 12A: (with NEO calibration typ. $\leq 0.5$ °) 0,5 - 1A: 5mA - 0,5 A: Phase (with NEO calibration typ. $\leq 0.5$ °) ±2° (with NEO calibration typ. $\leq 1$ °) Sensitivity 100 mV/A


#### **CLAMP-20AC**

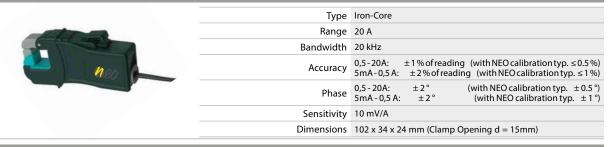

#### **CLAMP-200AC**

	Туре	Iron-Core
	Range	200 A
	Bandwidth	10 kHz
-	Accuracy	$\begin{array}{lll} 100\text{-}240\text{A:} & \pm 1\%\text{of reading}\text{(with NEO calibration typ.} \leq 0.8\%) \\ 10\text{-}100\text{A:} & \pm 2,5\%\text{of reading}\text{(with NEO calibration typ.} \leq 1\%) \\ 0,5\text{-}10\text{A:} & \pm 3,5\%\text{of reading}\text{(with NEO calibration typ.} \leq 2\%) \end{array}$
	Phase	$\begin{array}{lll} 100\text{ - }240\text{ A:} & \leq 2,5^{\circ} & \text{(with NEO calibration typ. } \leq 1.5^{\circ}) \\ 10\text{ - }100\text{ A:} & \leq 5^{\circ} & \text{(with NEO calibration typ. } \leq 3^{\circ}) \\ 0,5\text{ - }10\text{ A:} & \text{not specified} \end{array}$
	Sensitivity	10 mV/A
	Dimensions	135 x 51 x 30 mm (Clamp Opening d = 22mm)
	Diffictions	135 X 51 X 55 Hilli (Clarify Operating a = 22Hilli)

#### CLAMP-1000AC

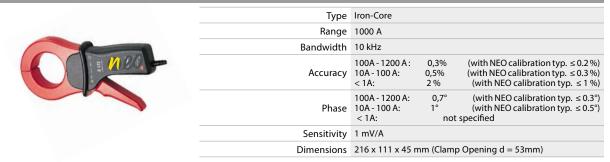

#### **CENTER ADAPTER**



This adapter can be used for small cable diameters to optimize the cable position and improve accuracy. This adapter is available upon request for all current sensors.

# AC COILS & SPLIT-CORE



#### **AC ROGOWSKI COILS**


FLEX-MINI-3000		
	Туре	Rogowski coil
	Range	30A / 300A / 3000A / 30kA
Ø 45mm	Bandwidth	PQA7000: up to 20 kHz PQA8000: up to 70 kHz PQA8000H: up to 500 kHz
	Accuracy	1% (with NEO calibration typ. ≤ 0.3 %)
	Coil Length	170 mm (Ø 45 mm)
FLEX 3000		
-	Туре	Rogowski coil
	Range	30A / 300A / 3000A / 30kA
Ø 125mm	Bandwidth	PQA7000: up to 20 kHz PQA8000: up to 70 kHz PQA8000H: up to 500 kHz
	Accuracy	1% (with NEO calibration typ. ≤ 0.3 %)
_	Coil Length	450 mm (Ø 125 mm)
FLEX 6000		
	Туре	Rogowski coil
	Range	30A / 300A / 3000A / 30kA
Ø 250mm	Bandwidth	PQA7000: up to 20 kHz PQA8000: up to 70 kHz PQA8000H: up to 500 kHz
	Accuracy	1% (with NEO calibration typ. $\leq$ 0.3 %)
	Coil Length	800 mm (Ø 250 mm)

Flexible Length, Flexible Coil Diameter, Flexible Bandwidth, Flexible Scaling, Flexible cable length on request Rogowski Coils for measurements up to 150kA are available.

#### **AC SPLIT-CORE SENSORS**

#### SPLIT-10A / 32A / 63A Type Split-Core Version 10 Arms / 32 A ms / 63A rms Bandwidth 3 kHz Accuracy Class 1 (IEC 61869-2) (with NEO calibration typ. $\leq 0.5 \%$ ) Sensitivity 333mV at nominal current Dimensions 32mm x 33.5mm 45.5mm (Clamp Opening Ø 10 mm) SPLIT-10A / 32A / 63A Type Split-Core Version 10 Arms / 600 Arms Bandwidth 20 kHz Accuracy Class 1 (IEC 61869-2) (with NEO calibration typ. ≤ 0.5 %) Sensitivity 333mV at nominal current Dimensions 59.2mm x 89.2mm 32.5mm (Clamp Opening Ø 32,5 mm)

# **RESIDUAL CURRENT SENSOR AC+DC (RCM)**

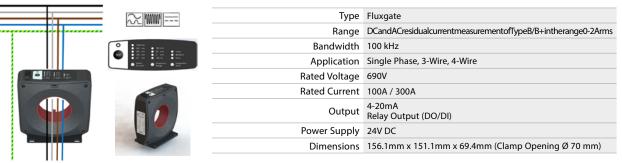



# **AC/DC HALL CLAMPS**

#### **AC/DC HALL CLAMPS**

#### CLAMP-300DC



Туре	Hall sensor
Range	300A DC
Bandwidth	DC to 150 kHz
Accuracy	1 % + 2 mA (with NEO calibration typ. $\leq$ 0.3 %)
Sensitivity	20 mV/A
Overload Capability	500A DC (1min)
Dimensions	205 mm x 60 mm x 15 mm (Clamp opening d = 32 mm)

#### CLAMP-2000DC



Туре	Hall sensor
Range	2000A DC
Bandwidth	DC to 20 kHz
Accuracy	2.5 % +/- 0.5A (with NEO calibration typ. $\leq$ 1.5 %)
Sensitivity	1 mV/A
Dimensions	205 mm x 60 mm x 15 mm (Clamp opening d = 32 mm)

#### **AC/DC SPLIT CORE**

#### SPLIT-300DC



Туре	Hall sensor
Range	300A DC
Bandwidth	DC to 150 kHz
Accuracy	1 % + 2 mA (with NEO calibration typ. $\leq$ 0.3 %)
Sensitivity	10 mV/A
Dimensions	205 mm x 60 mm x 15 mm (Clamp opening d = 32 mm)

# ICS-10A



Туре	Hall sensor
Range	10 A peak (Overload Capabilty 80A for 1sec)
Bandwidth	150 kHz
Accuracy	0.5% (with NEO calibration typ. $\leq$ 0.1 %)
Sensitivity	208 mV/A
Dimensions	62 mm x 42 mm x 25 mm
Safety Category	CAT II 1000V / CAT III 600V

# IPCS-XXA



Туре	Zero-Flux transducer
Range	IPCS-10A: 10A rms IPCS-25A: 25A rms IPCS-50A: 50A rms
Bandwidth	500 kHz
Accuracy	0.01%
Sensitivity	IPCS-10A: 40 mV/A IPCS-25A: 20 mV/A IPCS-50A: 10 mV/A
Dimensions	130 mm x 65 mm x 50 mm
Safety Category	CAT II 600V

# **AC/DC ZERO-FLUX SENSORS**



# **AC/DC ZERO FLUX TRANSDUCERS**

n ka	-		ы	
	ш	(0)	<b>(e)</b>	<b>6</b> 3
		-	-	ш



Туре	Zero-Flux
Range	60A rms (from -40° to +85°C)
Bandwidth	DC to 800 kHz
Accuracy	0.0033% of f.s.
Sensitivity	600:1
Dimensions	77 mm x 93mm x 78 mm (Opening d = 26 mm)

#### IN-500S



Туре	Zero-Flux
Range	500A rms (from -40° to +85°C)
Bandwidth	DC to 520 kHz
Accuracy	0.0015% of f.s.
Sensitivity	750:1
Dimensions	106 mm x 128 mm x 104 mm (Opening d = 36 mm)

# IN-1000S



Туре	Zero-Flux
Range	1000A rms (from -40° to +85°C)
Bandwidth	DC to 440 kHz
Accuracy	0.0012% of f.s.
Sensitivity	1500:1
Dimensions	106 mm x 128 mm x 104 mm (Opening d = 38 mm)

# IN-2000S



Туре	Zero-Flux
Range	2000A rms (from -40° to +85°C)
Bandwidth	DC to 140 kHz
Accuracy	0.0012% of f.s.
Sensitivity	2000:1
Dimensions	191 mm x 231 mm x 153 mm (Opening d = 70 mm)

#### **POWER SUPPLY**

#### SINGLE CHANNEL POWER SUPPLY WITH INTEGRATED SHUNT



±15V (for Zero-Flux Transducers, AC/DC Clamps, etc.)
1200 mA
selectable - 1 Ohm, 5 Ohm, 10 Ohm with 0.01% Accuracy
DC Version: 10-30 V DC AC Version: 100-230V AC
106x120x36mm (l x w x h) / Weight: 350g
-10°C to +45°C
Sensor supply: DSUB9 Output Signal: BNC



# VOLTAGE MEASUREMENT

# HIGH VOLTAGE DIVIDERS, TRANSFORMERS AND ISOLATED TRANSDUCERS



We offer different types of high-voltage adapters for measurements above 1600V DC. The portfolio covers voltage dividers, voltage transformers and isolated voltage dividers. Please contact your local sales partner or support@neo-messtechnik.com.

#### **ALIGATOR CLIP**



Current max. 36A

Voltage CAT III 1000V / CAT IV 600V

Colours red,black,blue,green,yellow,white,purple,brown,grey,yellow-green

Plugs Ø 4 mm

Dimensions 92 x 38 mm

#### SAFETY TEST LEAD



Current max. 25A

Voltage CAT III 1000 V

Cross Section 1,5 mm²

Colours red,black,blue,green,yellow,white,purple,brown,grey,yellow-green

Plugs Ø 4 mm

Length 0,25 m / 1 m / 2 m ... others on request

#### **SAFETY TEST LEAD FUSED**



Current max. 25 A (Fuse: 0.5A)

Voltage CAT III 1000 V

Cross Section 1,5 mm²

Colours red, black, blue, green, yellow, white

Plugs Ø 4 mm

Length 0,25 m / 1 m / 2 m ... others on request



# **ACCESSORIES**



Weofferawiderangeoftestingandmeasurementaccessories. Please checkourwebpageor contact us formore information regarding the following accessories. In addition we also provide custom-made solutions according to your needs.

#### Ø 4MM & Ø 2MM ACCESSORIES



# ADAPTERS



#### **MEASURING KITS**



#### **ADDITIONAL HARDWARE**



#### **CABLE REELS**



#### **STORAGE**



The catalogue with all products and detailed information can be downloaded at: www.neo-messtechnik.com

#### **HIGH VOLTAGE**



# BNC / HF / Micro Test



# **TESTING POLES / PROBES**



#### **CABLES**



# **GROUND RODS / LEAD HOLDERS**



#### **DIDACTIC ACCESSORIES**



We are also happy to send you a hard copy of the catalog. Just send us an email to support@neo-messtechnik.com



# MEASUREMENT SERVICES





#### **SYSTEM INTEGRATION**

Testbed Field Tests Turnkey Solutions

#### **MEASUREMENT SERVICES**

High Voltage Applications Equipment Testing International Standards Evaluation Efficiency Analysis Grid Impedance Measurement

#### **TRAINING**

#### **RENTAL SERVICE**

Instruments Sensors

#### **CALIBRATION**

In-House Calibration On-Site Calibration ISO Calibration





# SYSTEM INTEGRATION

#### **MEASUREMENTS**

#### Electrical:


Voltage, Current, Power, Power Quality, Impedance, Resistance, Isolation, Grouding, etc.

#### **Mechanical:**

Acceleration, Strain Gage, Speed, Torque, Vibration, etc.

#### Others:

Temperature, GPS, Video (high-speed, thermal), Data via Interfaces (RS232, CAN, Ethercat, etc.)

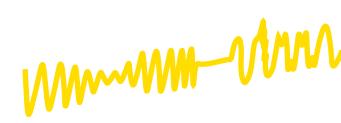

#### SYSTEM INTEGRATION

With our vast experience in the test & measurement market and our expertise for different applications and software programs we would be happy to support your next measurement project in the field or lab. We can integrate existing hardware as well as provide guidance in choosing the besthardware on the market to fit your needs.

#### **TURNKEY SOLUTIONS**

We can provide turnkey solution for your project. After discussing the requirements, we will create a specification book including plans (circuit plan, item list, etc.) and schematics. After approval you will receive your turnkeymeasurement solution.

One example is shown in the picture. In addition to the measurement instrument, other electrical equipment such as a power supply, protection, wiring etc. is provided in a cabinet.

#### OTHER SERVICES

- Application Engineer to support measurements
- Data Analysis
- Measurement Optimizations



# **MEASUREMENT SERVICES**



# **HIGH-VOLTAGE APPLICATIONS**

- Short Circuit Tests 16,7Hz / 15kV Railway Grid
- Disturbance & Transient Record Transmission & Distribution Grid
- Transformer and HVDC Efficiency Measurement (230V to 400kV)
- Interference Current Measurement
- Inductive Coupling Detection
- System Dynamics ROCOF / PMU
- Power Quality

# **GRID IMPEDANCE MEASUREMENT**

Grid Impedance Measurement (Z, phi, Re, Im, R, X / Zero-, Postivie- Negative Sequence)

- Fundamental Frequency Impedance (50Hz / 60Hz /...)
- Grid Impedance up to 10 kHz (Higher Frequencies)
- Grid Impedance up to 150 kHz (Supraharmonics)
- Grid Impedance up to 10 MHz (PLC)
- Interaction Inverter

# **EQUIPMENT TESTING**

- Resonances / Oscillations
- Switching Operations
- Distortion Analysis (THD, Unbalance)
- Overvoltage Detection DC-DC converters (e.g. 230V / 24V)
- Transients / Disturbances
- EV Charging Station Problem Detection
- Supraharmonics
- Inductive Coupling
- Photovoltaic System Testing (Performance, Safety,..)


# INTERNATIONAL STANDARDS


Grid:

Renewable:

Motor, Transformer:

Equipment: IEC 61000-3-2 /-12 and IEC 61000-3-3 /-11





# **EFFICIENCY ANALYSIS**

Using best available technology on the market for highly precise measurement results.

- EV Charging Stations
- Motor
- Generator
- Inverter
- Transformer
- HVDC





150kHz





# TRAINING & RENTAL

# **TRAINING**

While designing the user-interface of our products our goal is to make it as user friendly and intuitive as possible. Nevertheless we offer various training possibilities in addition to all documentation such as technical manuals and training manuals:

> On-Site Training

Perfect for groups and hands-on training directly at the customers' project site

> In-House Training

Perfect for hands-on training in our lab with different DUT's such as motors, transformers etc.

> Remote Training

Perfect for quick trainings or special measurement applications at remote locations

Besides training for our products we also offer general training courses for electrical applications incl.:

- Electrical Safety of electric vehicles
- Electrical Safety (EN50110)
- Measurment and data acquisition
- Testing of electrical installations (E8101)

# RENTAL SERVICES


#### **Measurement Instruments:**


Power Analyzers
Power Quality Analyzers
FFT Analyzers
Data Logger
Scope
Frequency Generators
Calibrators
Installation Tester
Grounding Resistance Meter

#### **Accessories:**

Current Sensors
Voltage Dividers, Transformers
Measurement Adapters
Extension Cables
Power Supplies & Battery Packs
Ruggedized Measurement Computer
and a lot more





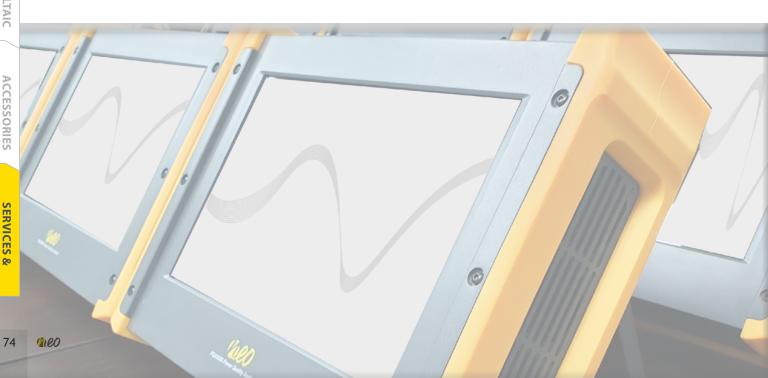

# CALIBRATION SERVICE



## **CALIBRATION**

The NEO R&D center is equiped with the most advanced calibration and testing equipment (Omicron, Fluke, Rohrer, etc.). Before your NEO data acquisition system is delivered, it is calibrated. Detailed calibration reports for your measurement system are included in the scope of delivery or can be requested at anytime.

It is recommended to calibrate your instrument at regular intervals. The standard norm across nearly every industry is annual calibration. In addition to extensive calibration and adjustment services we also carry out rigorous inspections that range from product functionality to sensors and accessories. This is a type of service that only manufacturers can provide.

We offer the following calibration services:

#### > Manufacturers Certificate:

Instrument Calibration, Power Calibration, Power Quality Calibration, Current Sensor Calibration, Banwidth Calibration up to 150kHz

> **Accredated ISO Certificate** (ISO17025, AKD/ÖKD) together with our partners: Instrument Calibration, Power Calibration, Current Sensor Calibration

#### **ON-SITE CALIBRATION**

All manufacturer certificates also can be issued directly on-site. This is especially useful for permanent installations or to reduce down-time.





# **TOTAL CARE PACKAGE**

The total care package for your measurement instruments will cover:

- Annual Calibration of instruments and sensors
- Warranty Extension
- Fast turn around times
- On-Site or In-House Services





# **COMPANY**



**COMPANY PROFILE** 

**SERVICE AND SUPPORT** 

**QUALITY** 

**SOCIETY AND ENVIRONMENT** 

**LOCATIONS** 





**SWITZERLAND** 







Training Center VIENNA AUSTRIA

# Mission:

To provide innovative, high-quality products that reflect the understanding of our customers needs for their specific application.

# **COMPANY PROFILE**



NEO Messtechnik is a young company with extensive experience.

### **EXPERIENCE**

- > 20 years of experience in the data acquisition market (DEWETRON, DEWESoft, Chauvin Arnoux, NORMA etc.)
- > 20 years of experience in the Power & Power Quality markets
- > 20 years in hardware and software development (Samsung, LG, etc.)

#### **PHILOSOPHY**

**INNOVATION** and **PARTNERSHIP** are basic elements in our companies philosophy.

- > Together with strong partners, our goal is to provide the best available technology for our clients.
- > Each project should build a long-term relationship between our clients and NEO Messtechnik
- > Research and Development is driven by a deep understanding of our customers needs
- > We believe in the continuous investment of Research & Development

## **OUR COMMITMENT**

- > Innovative products with the highest quality
- > Deep technical expertise
- > Knowledgeable sales and support team

## **COMPANY COLORS**

We combine **TRADITION** with **INNOVATION**. Therefore we have chosen the company colors based on early measurement instruments like of NORMA Vienna. These instruments were known for their high quality and precision. The color yellow combines the elements of brass, copper and varnished wood that were used in these instruments. This color is our symbol for combining old values with young ideas.





# SERVICE & SUPPORT

#### **FREE SUPPORT HOTLINE**

Customer orientation is our promise. Therefore we offer a free support hotline. In addition, we offer maintenance contracts for projects with extended services for our customers like defined reaction times, spare part availability, etc.

# support@neo-messtechnik.com

### **TRAINING**

While designing the user interface of our products, our goal was to make it user friendly and intuitive as possible. Nevertheless we offer various training possibilities, see Chapter "Measurement Services".

#### **SERVICE AND REPAIR**

The NEO Messtechnik can provide service and repairs for any of our products. Long-spare part availability and Upgrade options is one of our contributions to ensure low-resource usage. For information regarding service and repairs please contact your local distributor first or NEO Messtechnik directly.

### **WARRANTY EXTENSION**

### Our HIGH QUALITY allows us to provide an EXTENDED WARRANTY.

Neo only uses high quality components which have been used for some of the most-demanding applications worldwide. All components are internationally recognized brands which are also audited regularly. Neo provides one of the best warranties in the business. The 2 year warranty not only applies to the OEM instrument but also to sensors and accessories. This included warranty can be extended and on-site warranty services can be provided.



# **QUALITY**



#### **HIGHEST QUALITY**

Selecting the best available components for our instruments allows to provide our customers with an extended warranty for our products. In addition, all instruments are rigorously tested (thermal tests, shock & vibration, aging, drop tests, long-term tests, performance tests, etc.)



#### **LEADING IN SAFETY**

Overvoltages from power lines down to factories can be higher than normal operating voltages. To avoid any kind of electrical accident, NEO Messtechnik emphasizes the importance of a safe instrument design. For example, the high-voltage inputs of the PQA 8000 instrument (CAT IV 600V) are isolated up to 6kVp while maintaining high precision (0.05%) and high sampling (up to 1MS/s).





#### **COMPLIANCE WITH INTERNATIONAL STANDARDS**


All instruments are designed according to international standards for electrical safety and compatibility. Among others, all products comply with these standards: LVD Directive 2014 / EMC Directive 2014 / Rohs Directive 2015 EN 61000-3-2 / EN 61000-3-3 / EN 61326-1 / EN 55011 +A1, Class A



#### **LATEST TECHNOLOGY**

It is important to us to continuously adapt to the latest technologies. Right now we are participating in research projects for Virtual Reality, Artificial Intelligence for electrical equipment condition monitoring and others.



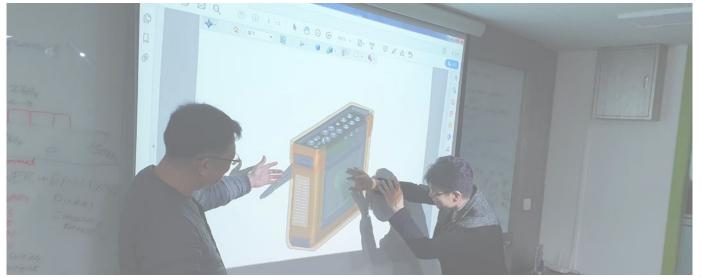



# SOCIETY & ENVIRONMENTAL

"We want to create an environment where every employee maximizes their skills and contributes to society. This philosophy is the backbone for everything we do."

#### SILVER AGER PROGRAM

In both the Austrian and Switzerland offices, retired people are working for NEO Messtechnik part time. We value the deep knowledge of our "Silver Agers" and want to give them the chance to actively participate. Activities include Service & Repair of instruments, organizational tasks or hardware development. Our "Silver Agers" can define their working hours and working environment themselves.

#### **SOCIAL RESPONSIBILITY**

NEO Messtechnik contributes to social community and environmental conservation programs.

- > Support of disabled people (cooperation with Behindertenintegrationswerkstätte Ternitz)
- > Support of the Dreamivil project in Ghana (dreamivill.com)
- > Support of tree planting projects (clickatree.com)


## **ENVIRONMENTAL IMPACT**

- > NEO Messtechnik guarantees long product life cycles, spare part availability and repair services to ensure low resource usage.
- > Among others NEO products support the integration of renewable and environmental friendly power sources and also help to promote energy savings.



# **NOTES**



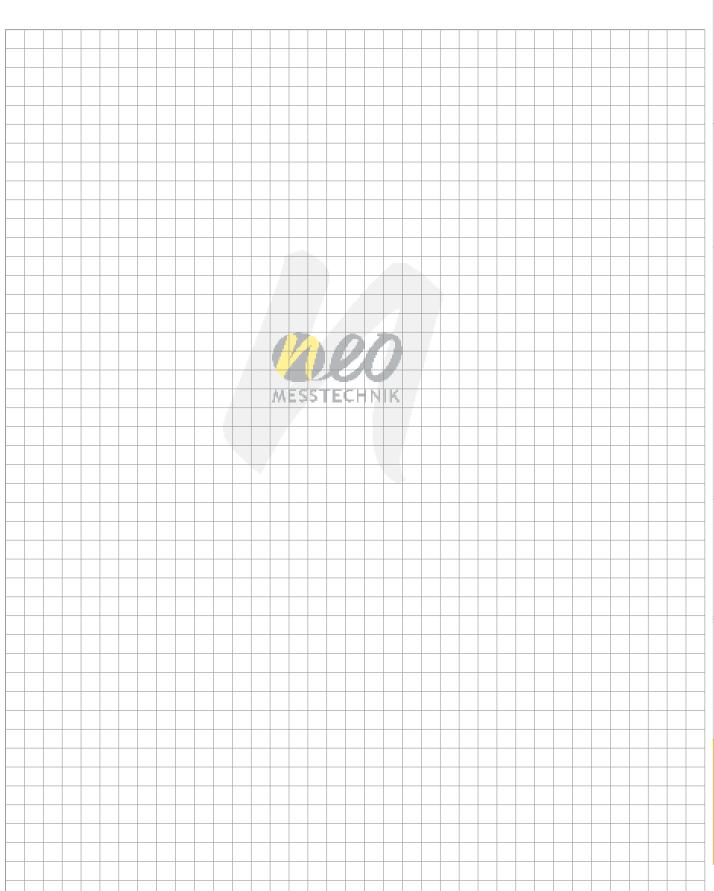



# **CONTACT**

## **AUSTRIA**

#### **NEO Messtechnik GmbH**

Sonnweg 4 2871 Zöbern +43 2642 20 301 sales@neo-messtechnik.com



## **SWITZERLAND**

SCHOTEC AG Moosacherstrasse 15 CH-8804 Au Telefon: +41 44 727 75 50 info@schotec.ch



# **SOUTH KOREA**

NEOMEZ Co. Ltd (14056) 282 Hagui-ro, Dongan-gu, Anyang-si, Gyeonggi-do Tel: (+82-31) 421 4281 neo@neomez.com www.neomez.com

